Manualslib.com - The Global Manuals Library

SHARP 26SL41M SERVICE MANUAL

Table of Contents

Table of Contents
service manual
sharp corporation
IMPORTANT SERVICE SAFETY PRECAUTION
safety notice
LOCATION OF USER'S CONTROL
INSTALLATION AND SERVICE INSTRUCTIONS
service adjustment
mts adjustment
CHASSIS LAYOUT
BLOCK DIAGRAM
SCHEMATIC DIAGRAMS
PRINTED WIRING BOARD ASSEMBLIES
REPLACEMENT PARTS LIST
crt unit
miscellaneous parts
packing parts
cabinet parts
cabinet parts location
26SL71M
29SL81M
PACKING OF THE SET
Other ManualsLib Projects

SHARP SERVICE MANUAL

S80G526SL41M/

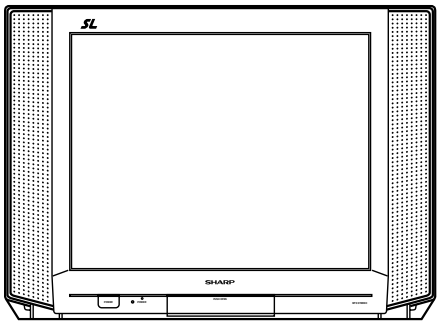

COLOR TELEVISION

Chassis No. SN-91A

MODELS 26SL41M, 26SL71M 29SL81M

In the interests of user-safety (Required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

CONTENTS

Page

- ELECTRICAL SPECIFICATIONS 1
- IMPORTANT SERVICE SAFETY PRECAUTION 2
- LOCATION OF USER'S CONTROL 4
- INSTALLATION AND SERVICE INSTRUCTIONS 5
- CHASSIS LAYOUT 11
- BLOCK DIAGRAM 12
- SCHEMATIC DIAGRAMS 15
- PRINTED WIRING BOARD ASSEMBLIES 32
- REPLACEMENT PARTS LIST 36
- PACKING OF THE SET 47

ELECTRICAL SPECIFICATIONS

POWER INPUT ..... 110-220 V AC 50/60 Hz
POWER RATING
  26SL41M ..... 120 W
  26SL71M ..... 125 W
  29SL81M ..... 130 W
PICTURE SIZE
  26SL41M, 26SL71M ..... 2,032 cm^2 (315 sq inch)
  29SL81M ..... 2,193 cm^2 (340 sq inch)
CONVERGENCE ..... Magnetic
SWEEP DEFLECTION ..... Magnetic
FOCUS ..... Hi-Bi-Potential Electrostatic
INTERMEDIATE FREQUENCIES
  Picture IF Carrier Frequency ..... 45.75 MHz
  Sound IF Carrier Frequency ..... 41.25 MHz
  Color Sub-Carrier Frequency ..... 42.17 MHz (Nominal)

AUDIO POWER
  OUTPUT RATING
    26SL41M ..... 1.5 W + 1.5 W
    26SL71M, 29SL81M ..... 5 W + 5 W (at 5% distortion and Dual CH Operate)
SPEAKER
  SIZE ..... 12 × 6 cm (2 pcs.)
  VOICE COIL IMPEDANCE
    26SL41M ..... 32 ohm at 400 Hz
    26SL71M, 29SL81M ..... 8 ohm at 400 Hz
ANTENNA INPUT IMPEDANCE
  VHF/UHF ..... 75 ohm Unbalanced
TUNING RANGES
  VHF-Channels ..... 2 thru 13
  UHF-Channels ..... 14 thru 69
  CATV Channels ..... 1 thru 125

Specifications are subject to change without prior notice.

IMPORTANT SERVICE SAFETY PRECAUTION

■ **Service work should be performed only by qualified service technicians who are throughly familiar with all safety checks and the servicing guidelines which follow:**

WARNING

1. For continued safety, no modification of any circuit should be attempted.
2. Disconnect AC power before servicing.
3. Semiconductor heat sinks are potential shock hazards when the chassis is operating.
4. The chassis in this receiver has two ground systems which are separated by insulating material. The non-isolated (hot) ground system is for the B+ voltage regulator circuit and the horizontal output circuit. The isolated ground system is for the low B+ DC voltages and the secondary circuit of the high voltage transformer.
   To prevent electrical shock use an isolation transformer between the line cord and power receptacle, when servicing this chassis.

SERVICING OF HIGH VOLTAGE SYSTEM AND PICTURE TUBE

When servicing the high voltage system, remove the static charge by connecting a 10k ohm resistor in series with an insulated wire (such as a test probe) between the picture tube ground and the anode lead. (AC line cord should be disconnected from AC outlet.)

1. Picture tube in this receiver employs integral implosion protection.
2. Replace with tube of the same type number for continued safety.
3. Do not lift picture tube by the neck.
4. Handle the picture tube only when wearing shatterproof goggles and after discharging the high voltage anode completely.

X-RADIATION AND HIGH VOLTAGE LIMITS

1. Be sure all service personnel are aware of the procedures and instructions covering X-radiation. The only potential source of X-ray in current solid state TV receivers is the picture tube. However, the picture tube does not emit measurable X-Ray radiation, if the high voltage is as specified in the "High Voltage Check" instructions.
   It is only when high voltage is excessive that X-radiation is capable of penetrating the shell of the picture tube including the lead in the glass material. The important precaution is to keep the high voltage below the maximum level specified.
2. It is essential that servicemen have available at all times an accurate high voltage meter.
   The calibration of this meter should be checked periodically.
3. High voltage should always be kept at the rated value –no higher. Operation at higher voltages may cause a failure of the picture tube or high voltage circuitry and;also, under certain conditions, may produce radiation in exceeding of desirable levels.
4. When the high voltage regulator is operating properly there is no possibility of an X-radiation problem. Every time a color chassis is serviced, the brightness should be tested while monitoring the high voltage with a meter to be certain that the high voltage does not exceed the specified value and that it is regulating correctly.
5. Do not use a picture tube other than that specified or make unrecommended circuit modifications to the high voltage circuitry.
6. When trouble shooting and taking test measurements on a receiver with excessive high voltage, avoid being unnecessarily close to the receiver.
   Do not operate the receiver longer than is necessary to locate the cause of excessive voltage.

IMPORTANT SERVICE SAFETY PRECAUTION

(Continued)

BEFORE RETURNING THE RECEIVER

(Fire & Shock Hazard)

Before returning the receiver to the user, perform the following safety checks.

1. Inspect all lead dress to make certain that leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the receiver.
2. Inspect all protective devices such as non-metallic control knobs, insulating materials, cabinet backs, adjustment and compartment covers or shields, isolation resistor-capacity networks, mechanical insulators and etc.
3. To be sure that no shock hazard exists, check for leakage current in the following manner.

- Plug the AC cord directly into a 127 volt AC outlet, (Do not use an isolation transformer for this test).
- Using two clip leads, connect a 1.5k ohm, 10 watt resistor paralleled by a 0.15µF capacitor in series with all exposed metal cabinet parts and a known earth ground, such as electrical conduit or electrical ground connected to earth ground.
- Use an AC voltmeter having with 5000 ohm per volt, or higher, sensitivity to measure the AC voltage drop across the resistor.
- Connect the resistor connection to all exposed metal parts having a return to the chassis (antenna, metal cabinet, screw heads, knobs and control shafts, escutcheon and etc.) and measure the AC voltage drop across the resistor.
  AII checks must be repeated with the AC ine cord plug connection reversed. (If necessary, a non-polarized adapter plug must be used only for the purpose of completing these check.)
  Any current measured must not exceed 0.5 milliamp. Any measurements not within the limits outlined above indicate of a potential shock hazard and corrective action must be taken before returning the instrument to the customer.

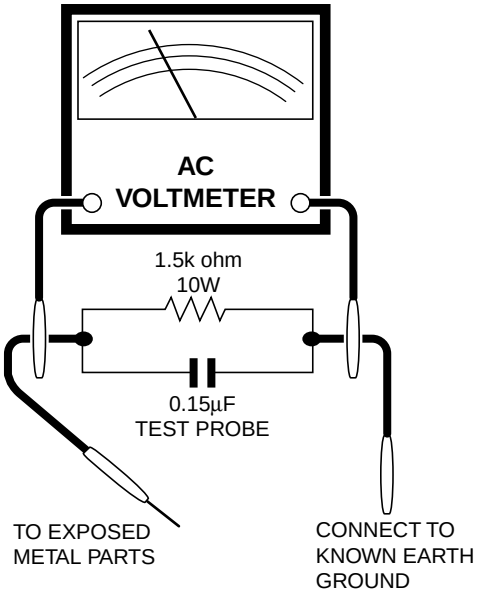

SAFETY NOTICE

Many electrical and mechanical parts in television receivers have special safety-related characteristics. These characteristics are often not evident from visual inspection, nor can protection afforded by them be necessarily increased by using replacement components rated for higher voltage, wattage and etc.
Replacement parts which have these special safety characteristics are identified in this manual; electrical components having such features are identified by "⚠" and shaded areas in the Replacement Parts Lists and Schematic Diagrams.

For continued protection, replacement parts must be identical to those used in the original circuit. The use of substitute replacement parts which do not have the same safety characteristics as the factory recommended replacement parts shown in this service manual, may create shock, fire, X-radiation or other hazards.

LOCATION OF USER'S CONTROL

Front Panel

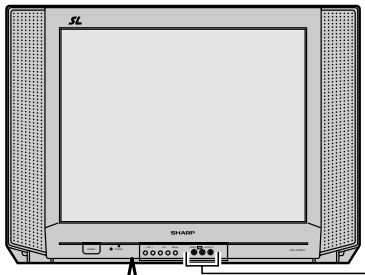

VIDEO/AUDIO IN 2 TERMINALS
(VIDEO/AUDIO terminals are also provided on the rear.)

POWER
Press → On.
Press again → Off.

SENSOR AREA FOR REMOTE CONTROL

VOLUME UP/DOWN
(+) Increases sound.
(–) Decreases sound.

CHANNEL UP/DOWN
(▲) Selects next higher channel.
(▼) Selects next lower channel.

MENU
Press → Accesses MAIN MENU.
Press again → Exits MAIN MENU.

Basic Remote Control Functions

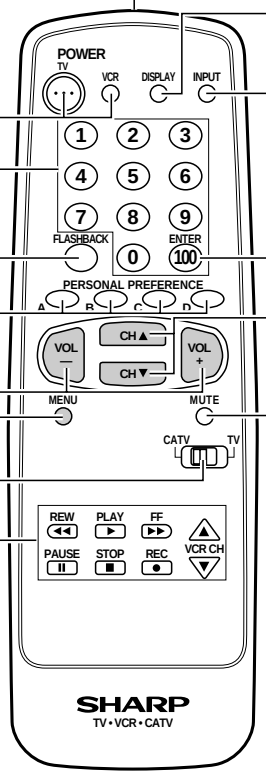

POWER
Press → On.
Press again → Off.

REMOTE KEYPAD
Accesses any channel from keypad.

FLASHBACK
Returns to previous channel.

PERSONAL PREFERENCE
With the Personal Preference buttons, you can program your favorite programs by using the 4 categories A, B, C and D. The channels can be accessed quickly by using these buttons.

VOLUME UP/DOWN
(+) Increases sound.
(–) Decreases sound.
• In menu mode, changes or selects the TV adjustments.

MENU
Press → Accesses MAIN MENU.
Press again → Exits MAIN MENU.

TV-CATV MODE SELECT SWITCH
In TV position, sends power and channel select commands (Channel up/down and Random Access buttons) to the TV.
In CATV position, sends power and channel select commands to a cable TV converter.

VCR CONTROL

Infrared Transmitter Window

DISPLAY
Press → Displays receiving channel for four seconds.
Press again → Removes display.
• Temporarily displays receiving channel when in Closed Caption mode.

INPUT
Press → Switch to external video INPUT mode.
Press again → Switch to TV mode.

ENTER
Used in some instances where a VCR or Cable Converter Box requires an "enter" command after selecting channels, when using the REMOTE KEYPAD button.

CHANNEL UP/DOWN
(▲) Selects next higher channel.
(▼) Selects next lower channel.
• Moves the " ⬍ " mark of the MENU screens.

MUTE
Press → Mutes sound.
Press again → Restores sound.
• CLOSED CAPTION appears when sound is muted.

Note:

- The above shaded buttons on the Remote Control glow in the dark. To use the glow-in-the-dark display on the remote control, place it under a fluorescent light or other lighting.
- The phosphorescent material contains no radioactive or toxic material, so it is safe to use.
- The degree of illumination will vary depending on the strength of lighting used.
- The degree of illumination will decrease with time and depending on the temperature.
- The time needed to charge the phosphorescent display will vary depending on the surrounding lighting.
- Sunlight and fluorescent lighting are the most effective when charging the display.

INSTALLATION AND SERVICE INSTRUCTIONS

Note: (1) When performing any adjustments to resistor controls and transformers use non-metallic screwdrivers or TV alignment tools.
(2) Before performing adjustments, the TV set must be on at least 15 minutes.

CIRCUIT PROTECTION

The receiver is protected by a 5.0A fuse (F701), mounted on PWB-A, wired into one side of the AC line input.

X-RADIATION PROTECTOR CIRCUIT TEST

After service has been performed on the horizontal deflection system, high voltage system, B+ system, test the X-Radiation protection circuit to ascertain proper operation as follows:

1. Apply 127V AC using a variac transformer for accurate input voltage.
2. Allow for warm up and adjust all customer controls for normal picture and sound.
3. Receive a good local channel.
4. Connect a digital voltmeter to TP653 and make sure that the voltmeter reads 11.2 ± 0.6V.
5. Apply external 13.8V DC at TP653 by using an external DC supply, TV must be shut off.
6. To reset the protector, unplug the AC cord and make a short circuit between TP651 and TP652. Now make sure that normal picture appears on the screen.
7. If the operation of the horizontal oscillator does not stop in step 5, the circuit must be repaired before the set is returned to the customer.

HIGH VOLTAGE CHECK

High voltage is not adjustable but must be checked to verify that the receiver is operating within safe and efficient design limitations as specified checks should be as follows:

1. Connect an accurate high voltage meter between ground and anode of picture tube.
2. Operate receiver for at least 15 minutes at 127V AC line voltage, with a strong air signal or a properly tuned in test signal.
3. Enter the service mode and select the service adjustment "S19" and Bus data "01" (Y-mute on).
4. The voltage should be approximately, 28.7kV (26SL41M/71M)/29.7kV(29SL81M)(at zero beam). If a correct reading cannot be obtained, check circuitry for malfunctioning components. After the voltage test, make Y-mute off to the normal mode.

For adjustments of this model, the bus data is converted to various analog signals by the D/A converter circuit.

Note: There are still a few analog adjustments in this series such as focus and master screen voltage. Follow the steps below whenever the service adjustment is required. See "Table-B" to determine, if service adjustments are required.

1. Service mode

Before putting unit into the service mode, check that customer adjustments are in the normal mode. Use the reset function in the video adjustment menu to ensure customer controls are in their proper (reset) position.

2. Service number selection

Once in the service mode, press the Ch-up or Ch-down button on the remote control unit or at the set. The service adjustment number will vary in increments of one, from "S01" to "OP2" (26SL41M)/ "M05" (26SL71M, 29SL81M). Select the item you wish to adjust.

3. Data number selection

Press the Vol-up or down button to adjust the data number.

To enter the service mode and exit service mode.

While pressing the Vol-up and Ch-up buttons at the same time, plug the AC cord into a wall socket.
Now the TV set is switched on and enters the service mode.
To exit the service mode, turn the television off by pressing the power button.

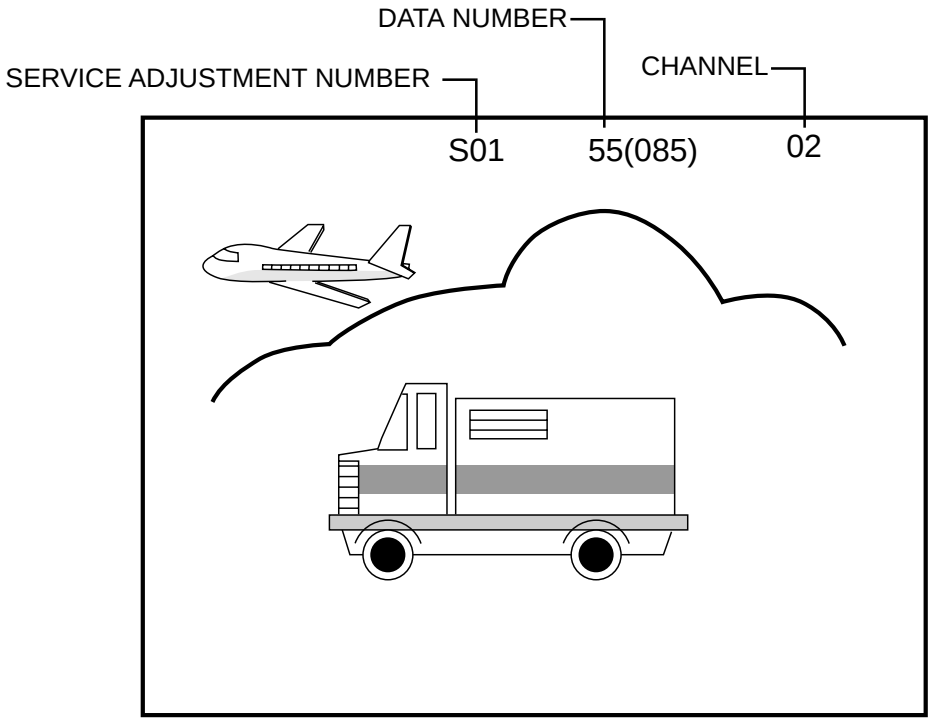

Figure A.

SERVICE NUMBER	ADJUSTMENT ITEM	DATA		ADJUSTMENT CONTENTS
		INITIAL VALUE	RANGE	
S01	PICTURE	55	00-7F	
S02	TINT	46	00-7F	
S03	COLOR	32	00-7F	
S04	BRIGHTNESS	40	00-7F	
S05	SHARPNESS	28/24	00-3F	Must be set to "28"(26SL41M/71M)/"24"(29SL81M)
S06	VERTICAL PHASE	00	00-07	Must be set to "00"
S07	HORIZONTAL PHASE	12	00-1F	
S08	RF-AGC	23	00-3F	
S09	VERTICAL AMP	20	00-3F	
S10	PIF VCO	2C	00-7F	
S11	R CUT-OFF	00	00-FF	
S12	G CUT -OFF	00	00-FF	
S13	B CUT-OFF	00	00-FF	
S14	G GAIN	7F	00-FF	
S15	B GAIN	7F	00-FF	
S16	TRAP	00/01	00 or 01	Must be set to "00"(26SL41M/71M)/"01"(29SL81M)
S17	BALANCE	20	00-3F	Must be set to "20"
S18	C.C. POSITION	17	00-7F	
S19	MUTE	00	00,01,03	"00"=Normal, "01"=No Y, "03"=No Vertical
S20	ENERGY SAVE OFFSET	20	00-3F	Must be set to "19"
S21	INT. CYCLE TIMING	7A	00-1F	Must be set to "7A"
S22		00	00	No Setting
S23	TUNER SETUP	00	00, 01	Must be set to "00"
OP1	OPTION (Set to each model)	00	00-FF	Must be set to "E1"=26SL41, "E7"=26S71M, 29SL81M
OP2	OPTION (Set to each model)	00	00-FF	Must be set to "0C"=26SL41M, "0F"=26SL71M, "8F"=29SL81M
M01	INPUT LEVEL	0A	00-0F	Only for Models 26SL71M, 29SL81M
M02	ST VCO	20	00-3F	
M03	FILTER	1C	00-3F	
M04	WIDE BAND	20	00-3F	
M05	SPECTRAL	1B	00-3F	

Table - A

Holding down both the CH-up/down buttons on the TV set at service mode for more than 2 seconds will automatically write the above initial values into IC2101.

PART REPLACED	ADJUSTMENT		NOTES
	NECESSARY	UNNECESSARY	
IC2001		X	Data is stored in IC2101.
IC201	X		The adjustment is needed to compensate for characteristics of parts including IC201 and MTS level (M01).
IC2101	X		Holding down both the CH-up/down buttons on the TV set in the service mode for more than 2 seconds will automatically write the above initial values into IC2101. Then perform a complete adjustment.
CRT	X		Adjust items related to picture tube only.
IC3001	X		Adjust items related to MTS only (M01~M05).

Table - B

■ SERVICE ADJUSTMENT

VCO Adjustment

1. Connect a digital voltmeter between pin (44) of IC201 and ground.
2. Receive a good local channel.
3. Enter the service mode and select the service adjustment "S10".
4. Adjust the data so that digital voltmeter reads 2.2V.
5. Adjustment is completed, remove the voltmeter, return to "normal" mode.

RF AGC Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S08".
3. Set the data value to point where no noise or beat appears.
4. Select another channel to confirm that no noise or beat appears.
   Note 1: You will have to come out of the service mode to select another channel.
   Note 2: Setting the data to "00" will produce a black raster.

Screen Adjustment

1. Connect a oscilloscope between TP854 and GND on the CRT Unit.
2. Receive a good local channel.
3. Enter the service mode and select the service adjustment "S03" and set the data value to "00" to set the color level to minimum. (Record original data code under adjustment "S03" before changing) You may skip this step, if you selected a B/W picture or monoscope pattern.
4. Select the service adjustment "S19" and adjust the data value to "01", this turn off the luminance signal (Y-mute).
5. Select the service adjustment "S04" and adjust data value to obtain 2.35 V on the oscilloscope screen.



6. Adjust the master screen control until the raster darkens to the point where raster is barely seen.
7. Adjust the service adjustments "S11" red, "S12" green and "S13" blue to obtain a good grey scale with normal whites at low brightness level.
8. Select the service adjustment "S19" and reset data to "00". Select the service adjustment "S03" and reset data to obtain normal color level.
9. Remove oscilloscope and reset the master screen control to obtain normal brightness range.

White Balance Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S03" and set to "00" (minimum color)(Record original data code under adjustment "S03" before changing). "S03" does not have to be adjusted, if you selected a B/W picture or monoscope pattern.
3. Alternately adjust the service adjustment data of "S14" and "S15" until a good grey scale with normal whites is obtained.
4. Select the service adjustment "S03" and adjust data to obtain normal color level.

Sub-Picture Adjustment

1. Receive a good local channel.
2. Make sure the customer picture control is set to maximum.
3. Enter the service mode and select the service adjustment "S01".
4. Adjust the data value to achieve normal contrast range.

Sub-Tint Adjustment

1. Receive a good local channel.
2. Set customer tint control to center of it's range.
3. Enter the service mode and select the service adjustment "S02".
4. Adjust "S02" data value to obtain normal flesh tones.

Sub-Color Adjustment

1. Receive a good local channel.
2. Make sure the customer color control is set to center position.
3. Enter the service mode and select service adjustment "S03".
4. Adjust "S03" data value to obtain normal color level.

Sub-Brightness Adjustment

1. Receive a good local channel.
2. Make sure the customer brightness control is set to center position.
3. Enter the service mode and select the service adjustment "S04".
4. Adjust "S04" data value to obtain normal brightness level.

Vertical-Size Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S09".
3. While observing the top and bottom of the screen, adjust "S09" data value to proper vertical size.

Vertical Phase Adjustment

1. Enter the service mode and select the service adjustment "S06".
2. Adjust data value to "00".

Note: This must be set "00" when changed data retrace line will appear.

Horizontal Position Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S07".
3. Adjust "S07" data value so that picture is centered.

Caption Position Adjustment (Horizontal)

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S18".
3. A black text box appears on the screen. (see **Figure B.** below)
4. Adjust "S18" data value so that text box is positioned in the center of the screen.

3.58MHz Trap Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S16".
3. This is a two position adjustment, "00" is ON, "01" is OFF.
4. Adjust data value to "00"(26SL41M/71M)/"01" (29SL81M) for normal viewing.

Sharpness and Audio Balance Adjustments

1. Receive a good local channel.
2. Enter the service mode and select the service adjustments "S05" for sharpness and "S17" for audio balance.

- **Sharpness Adjustment**

3. Adjust data value to "28"(26SL41M/71M)/"24" (29SL81M)(center of data range) for sharpness adjustment.

- **Audio Balance Adjustment**

4. Adjust data value to "20"(center of data range) for audio balance adjustment.

Energy save offset Adjustment

1. Enter the service mode and select the service adjustment "S20".
2. Adjust data value to "19".

Note: This position is used to preset the level for the energy save function.

Other Adjustments

1. Enter the service mode.
2. Adjust the following data values as listed below.

S21	"7A"	INT. CYCLE TIMING
S22	"00"	No Setting
S23	"00"	TUNER SETUP

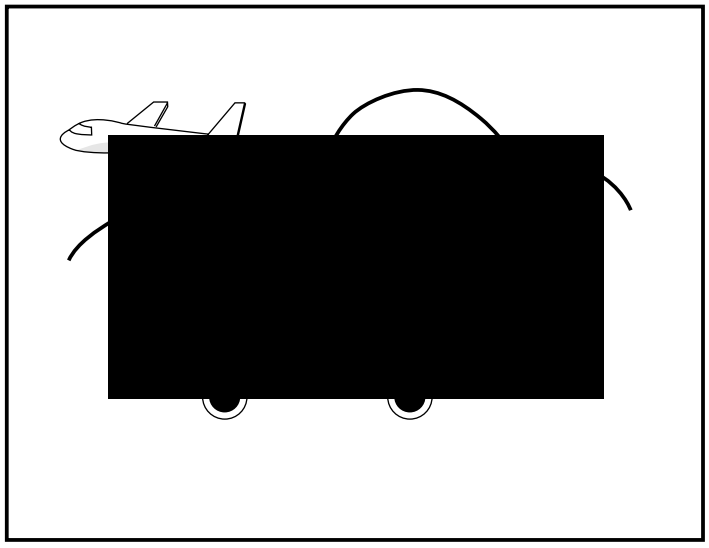

Figure B.

■ MTS ADJUSTMENT
(Only for Models 26SL71M, 29SL81M)

MTS Level Adjustment
1. Feed the following monaural signal to pin (14) of IC3001.
   Monaural signal : 300 Hz, 245 mVrms
2. Connect the rms voltmeter to pin (39) of IC3001.
3. Enter the service mode and select the service adjustment "M01".
4. Adjust the data so that the rms voltmeter reads 490 ± 10 mVrms.

MTS VCO Adjustment
1. Keep the unit in no-signal state.
2. Connect the frequency counter to pin (39) of IC3001.
3. Connect a capacitor (100µF, 50V) in between positive(+) side of C3005 and ground.
4. Enter the service mode and select the service adjustment "M02"
5. Adjust the data so that the frequency counter reads 62.94 ± 0.75 kHz.

Filter Adjustment
1. Feed the following stereo pilot signal to pin (14) of IC3001 .
   Stereo pilot signal: 9.4 kHz, 600 mVrms.
2. Enter the service mode and select the service adjustment "M03".
3. Adjust the data at the point where "OK" appears on the screen. The "OK" represents the approximate center of the adjustable range of the data.

Separation Adjustment
1. Connect the rms voltmeter to pin (39) of IC3001.
2. Receive the following composite stereo signal 1.
   Composite stereo signal: 30% modulation, left channel only, noise reduction on, 300 Hz
3. Enter the service mode and select the service adjustment "M04".
4. Adjust the data until the AC voltage reading of the rms voltmeter is minimum.
5. Receive the following composite stereo signal 2.
   Stereo signal: 30% modulation, left channel only, noise reduction on, 3 kHz
6. Enter the service mode and select the service adjustment "M05".
7. Adjust the data until the AC voltage reading of the rms voltmeter is minimum.
8. Take the above steps 1 thru 7 again for fine adjustment.

CHASSIS LAYOUT

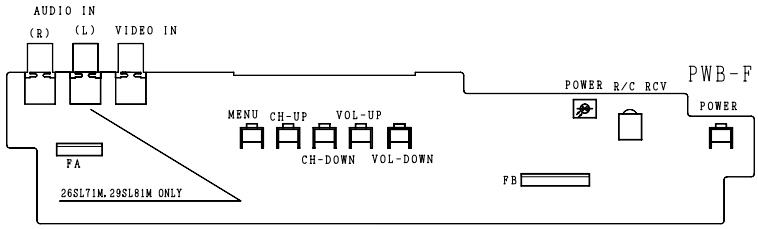





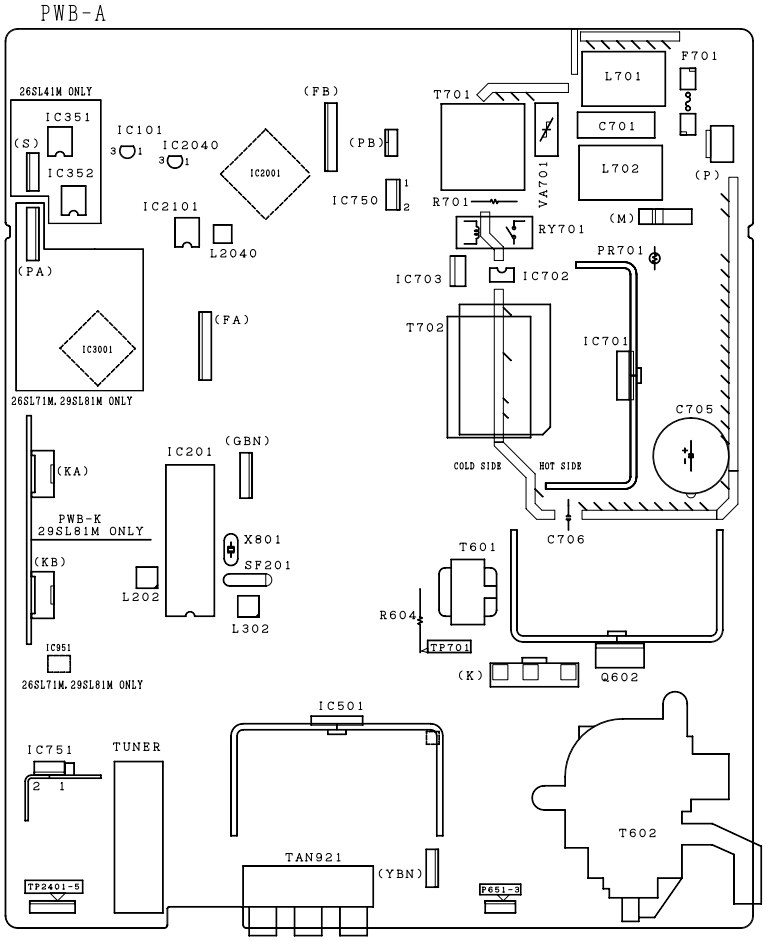

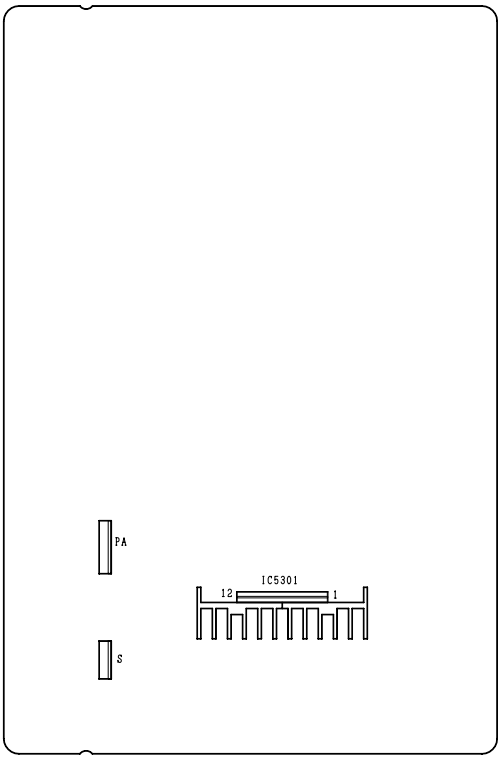

1	2	3	4	5	6

MODEL 26SL41M BLOCK DIAGRAM

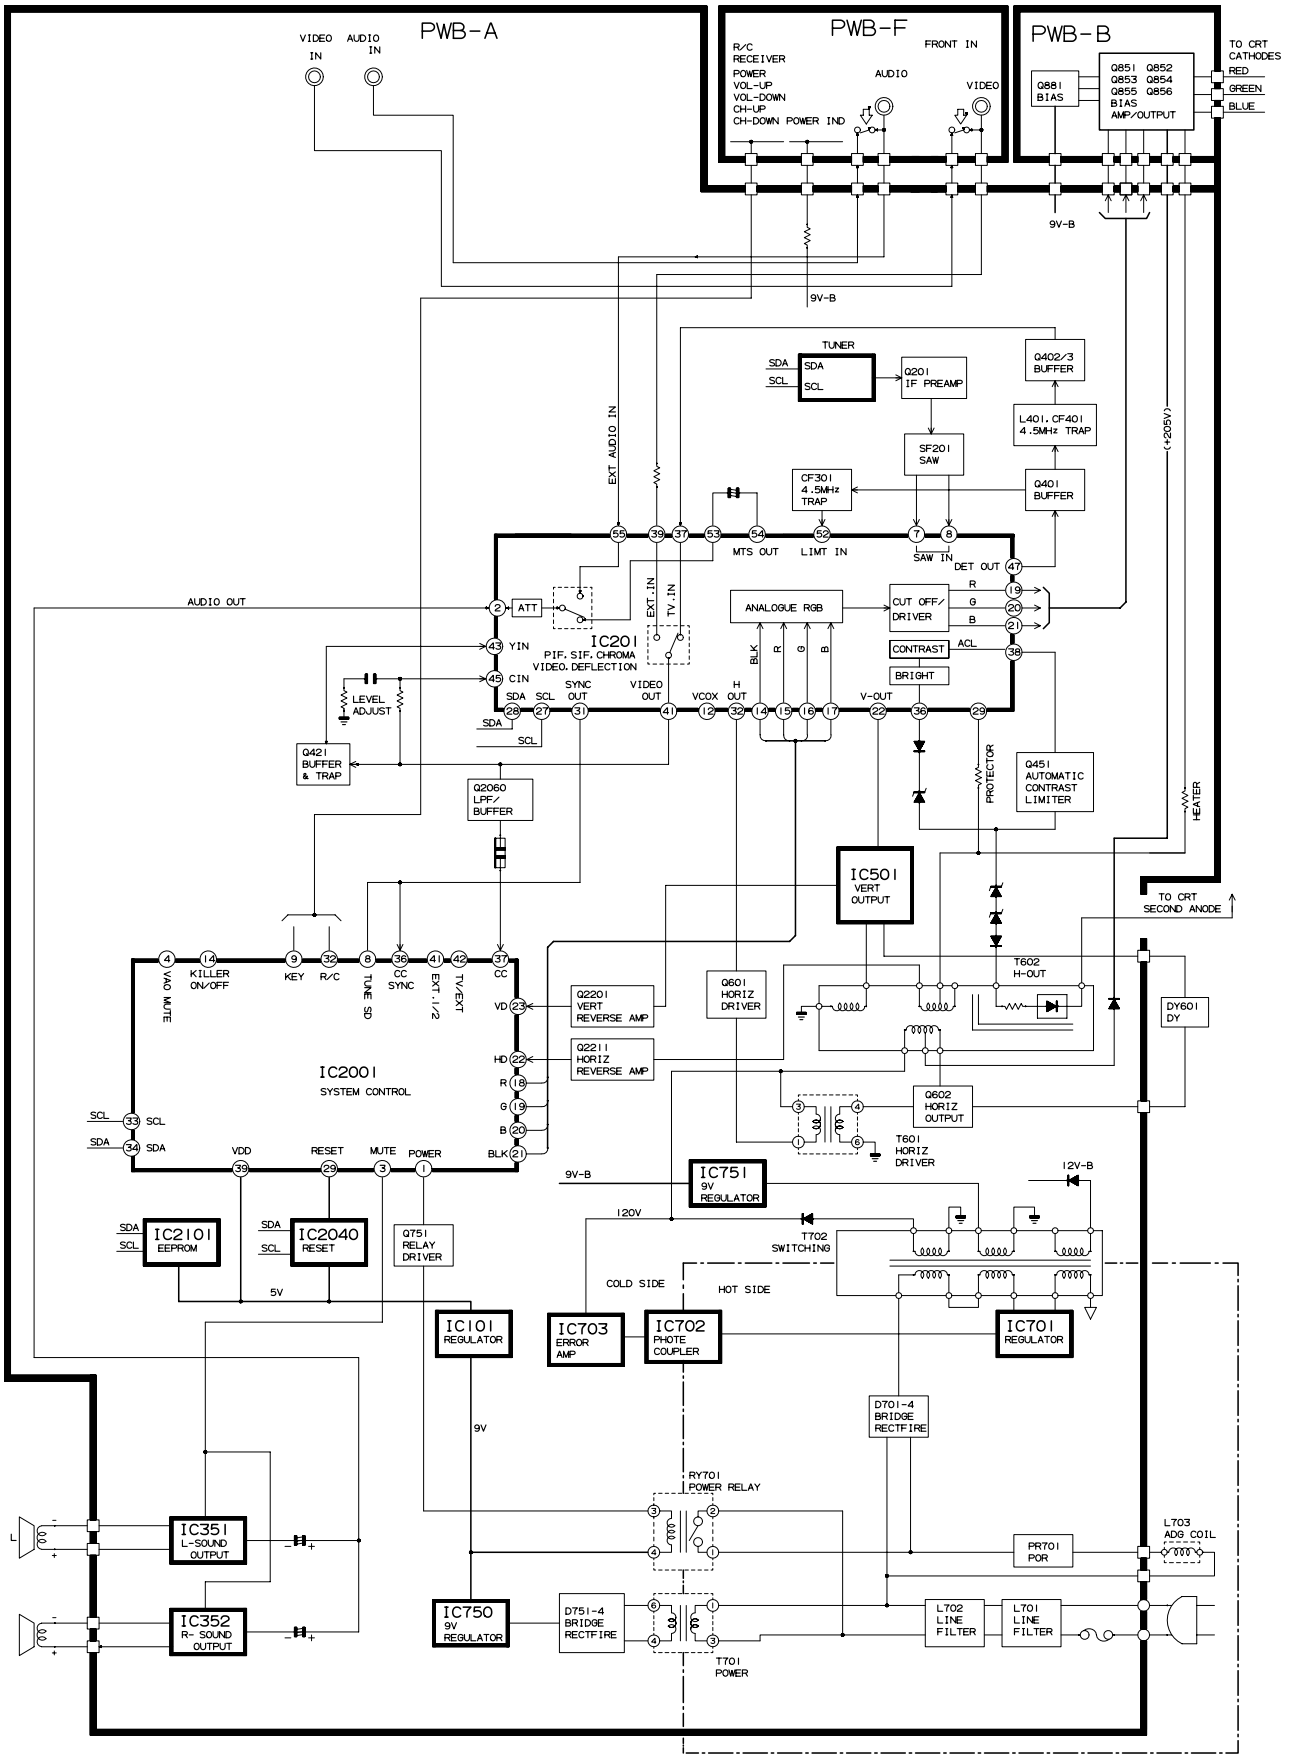

MODEL 26SL71M BLOCK DIAGRAM

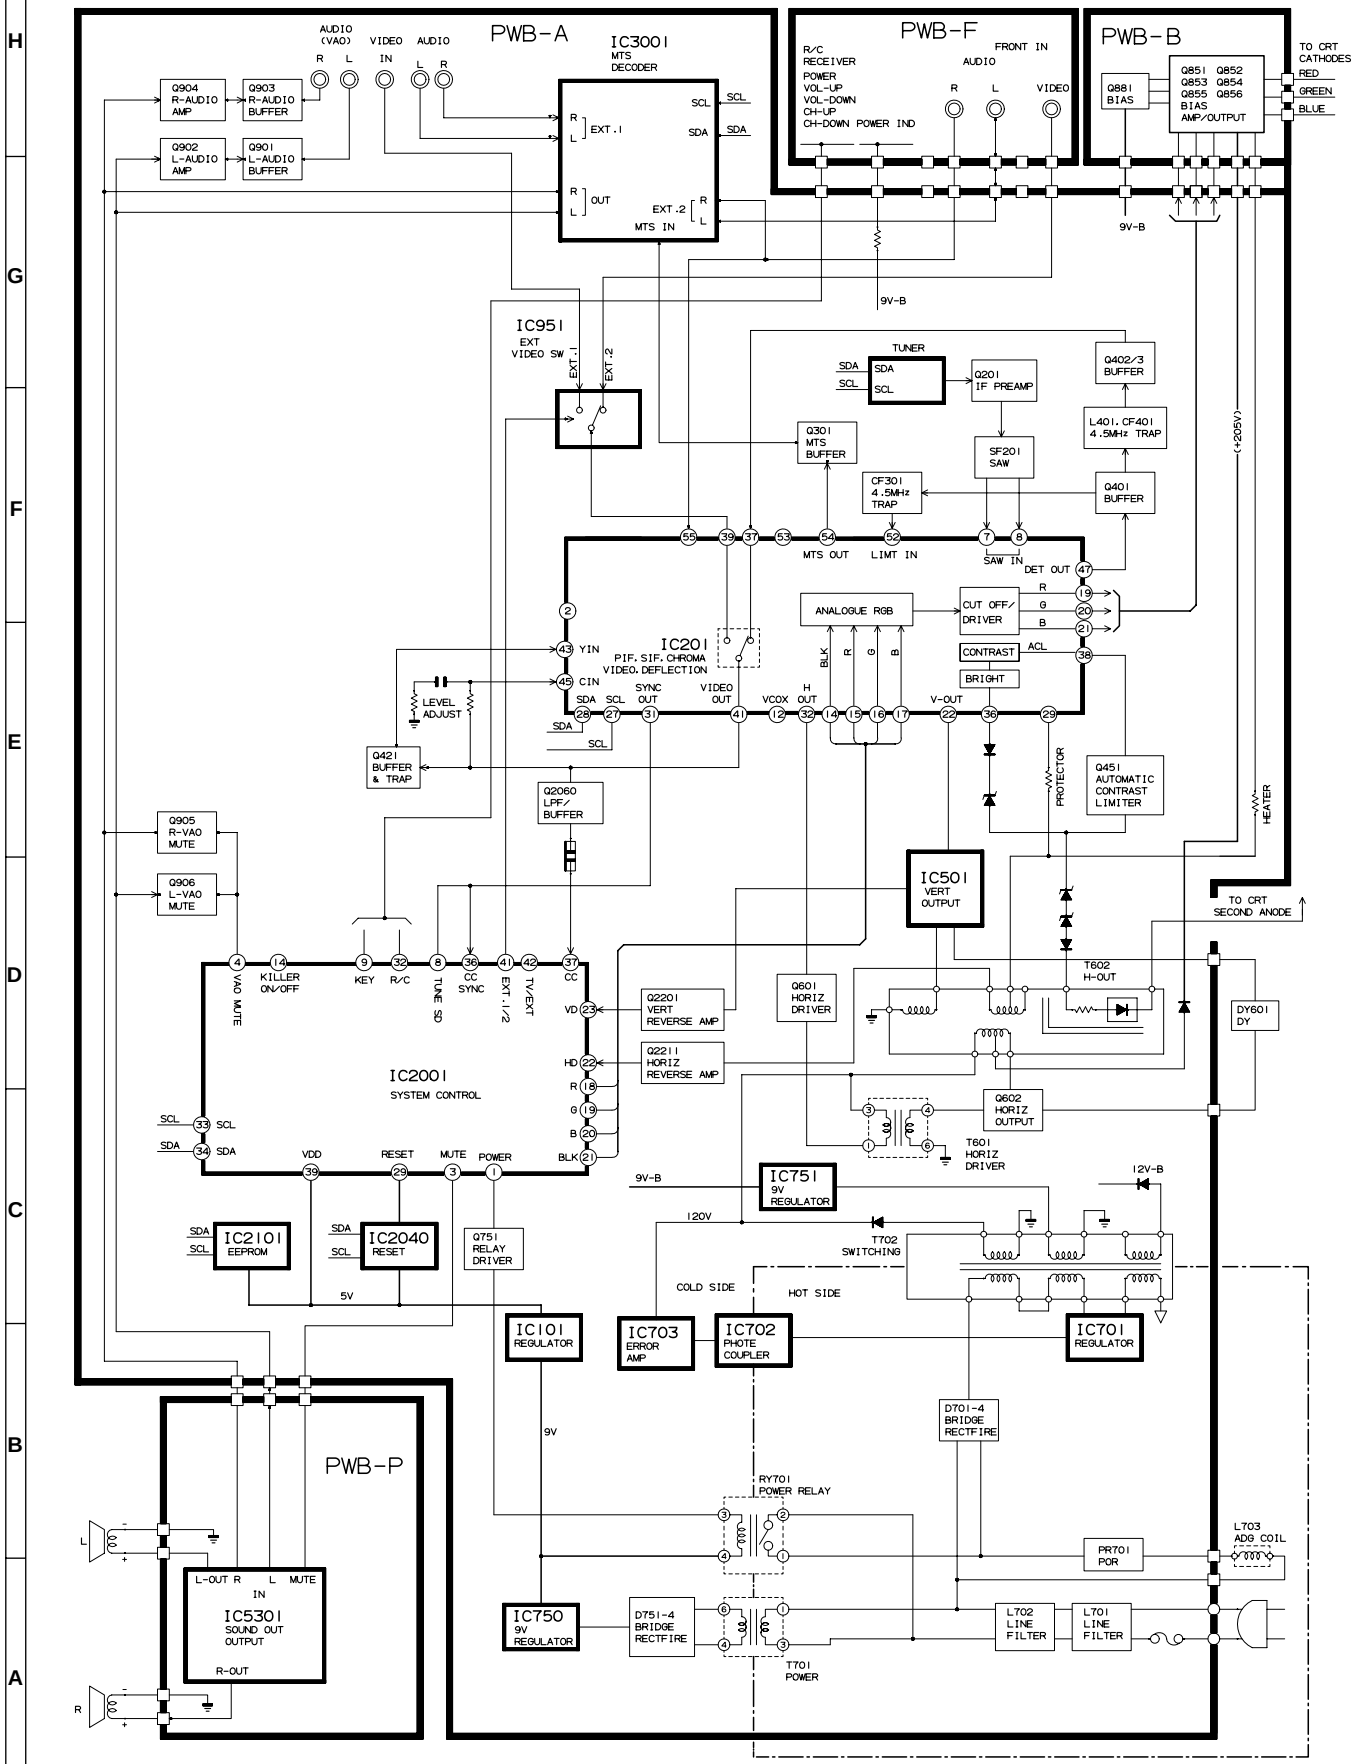

MODEL 29SL81M BLOCK DIAGRAM

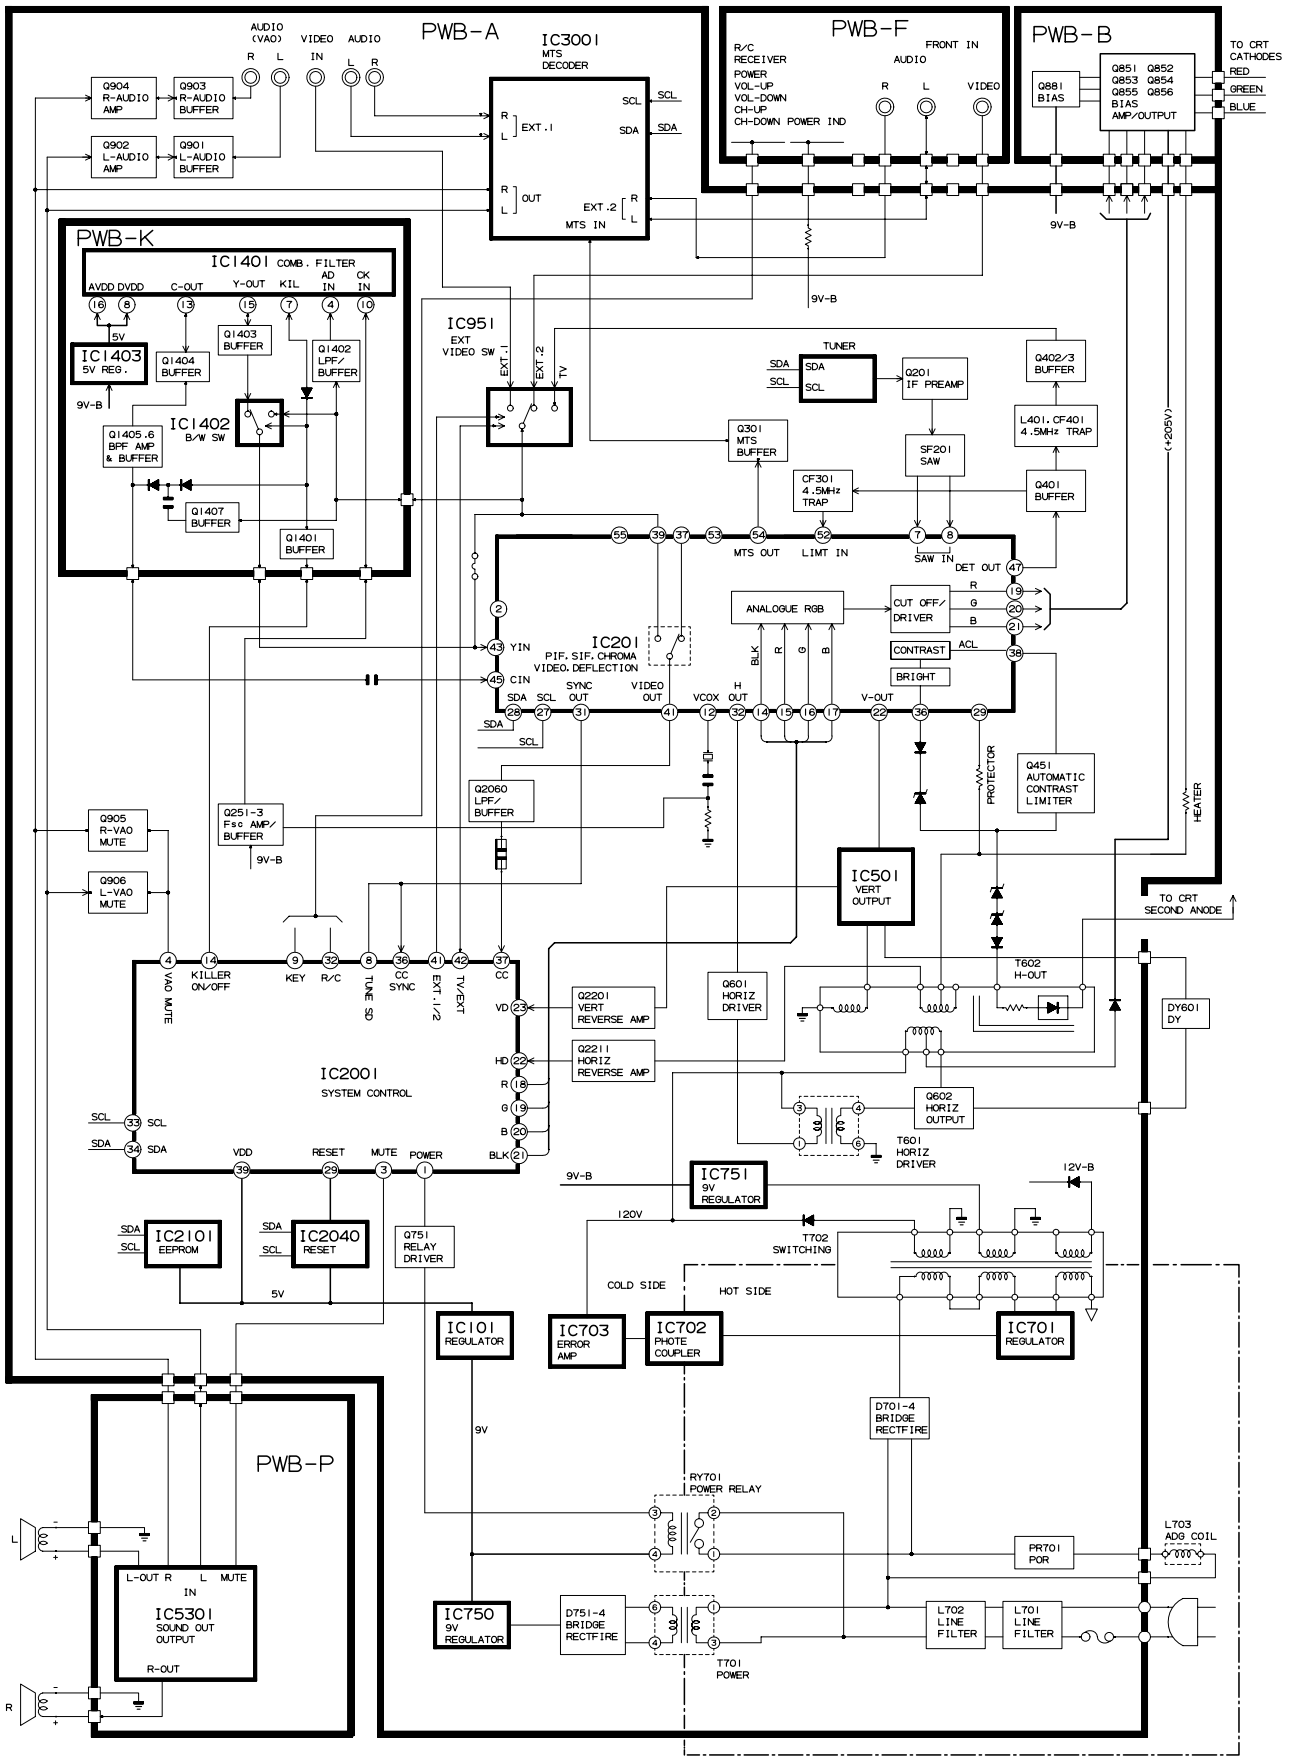

DESCRIPTION OF SCHEMATIC DIAGRAM

NOTES:

1. *The unit of resistance "ohm" is omitted. (K=kΩ=1000Ω, M=MΩ)*
2. *All resistors are 1/16 watt, unless otherwise noted.*
3. *All capacitors are μ F, unless otherwise noted. (P=pF=μμF)*
4. *(G) indicates ±2% tolerance may be used.*
5. *⏚ indicates line isolated ground.*
6. *⏚ indicates hot ground.*

VOLTAGE MEASUREMENT CONDITIONS:

1. *All DC voltages are measured with DVM connected between points indicated and chassis ground, line voltage set at 110-220V AC and all controls set for normal picture unless otherwise indicated.*
2. *All voltages measured with 1000μ V B & W or Color signal.*

WAVEFORM MEASUREMENT CONDITIONS:

1. *Photographs taken on a standard gated color bar signal, the tint setting adjusted for proper color. The wave shapes at the red, green and blue cathodes of the picture tube depend on the tint, color level and picture control.*
2. *indicates waveform check points (See chart, waveforms are measured from point indicated to chassis ground.)*

⚠ *AND SHADED ( ) COMPONENTS = SAFETY RELATED PARTS.*
▲ *MARK= X-RAY RELATED PARTS.*

This circuit diagram is a standard one, printed circuits may be subject to change for product improvement without prior notice.

WAVEFORMS

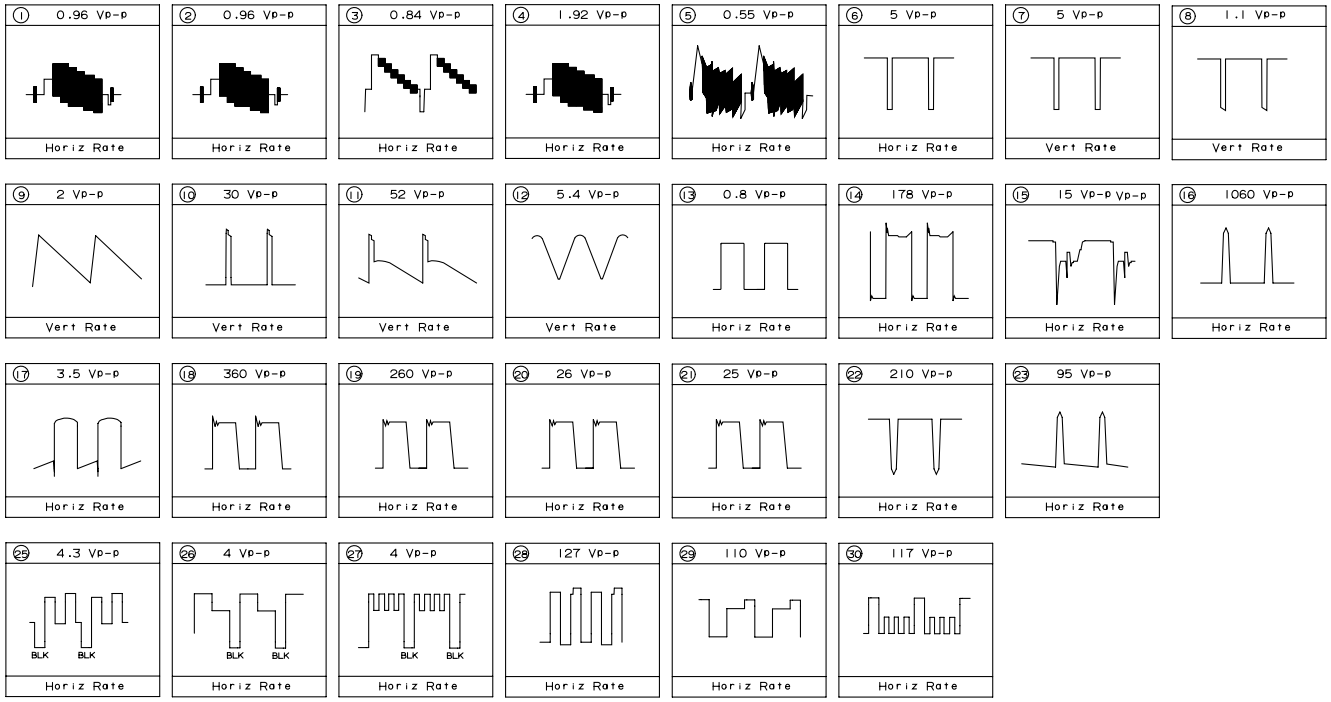

MODEL 26SL41M SCHEMATIC DIAGRAM: MAIN-1 Unit

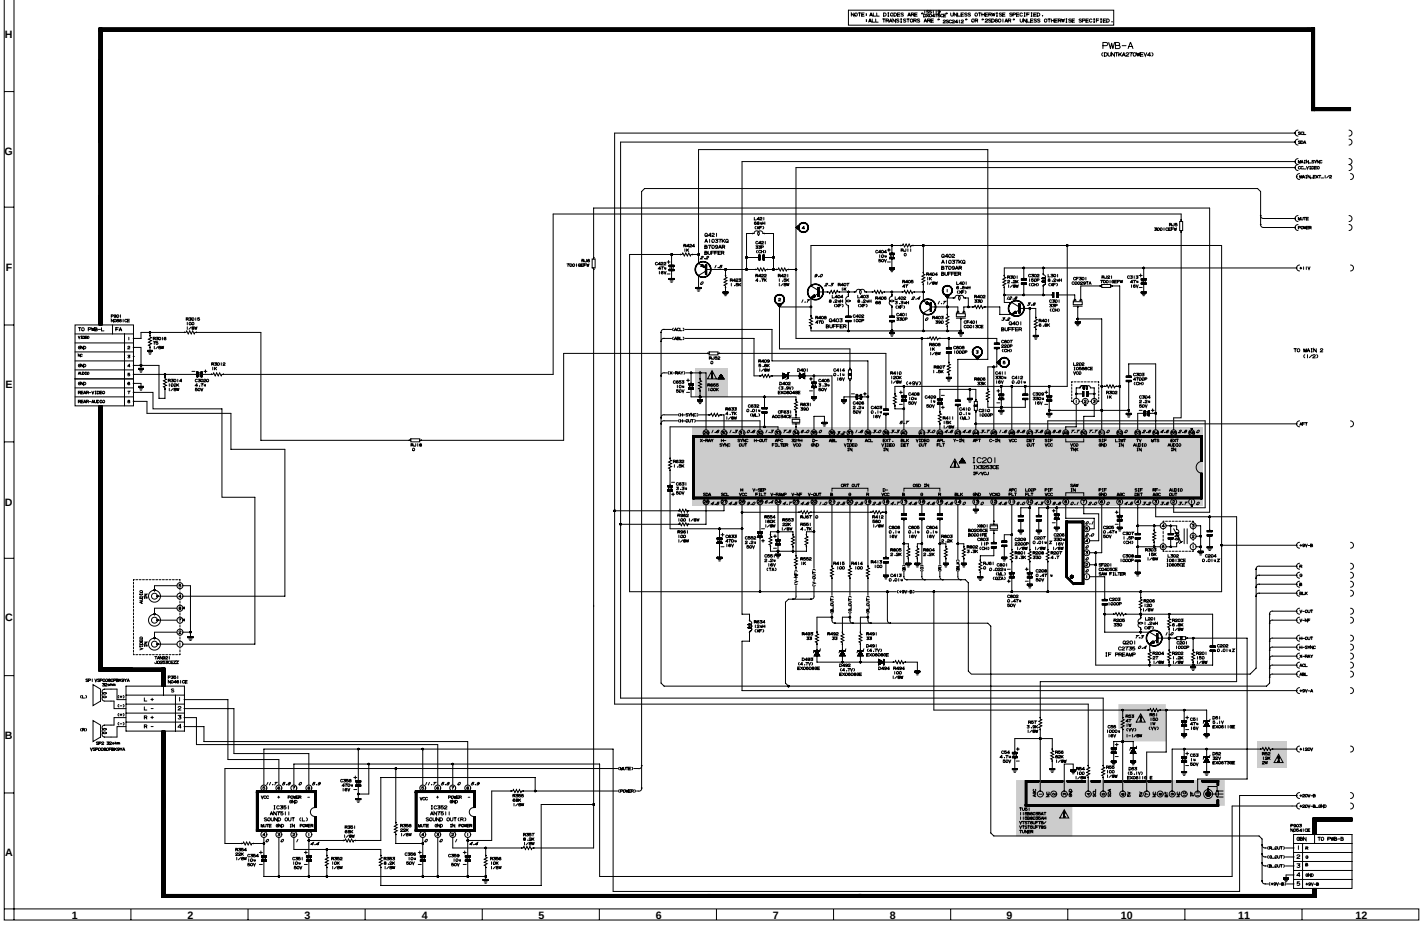

MODEL 26SL41M SCHEMATIC DIAGRAM: MAIN-2 Unit

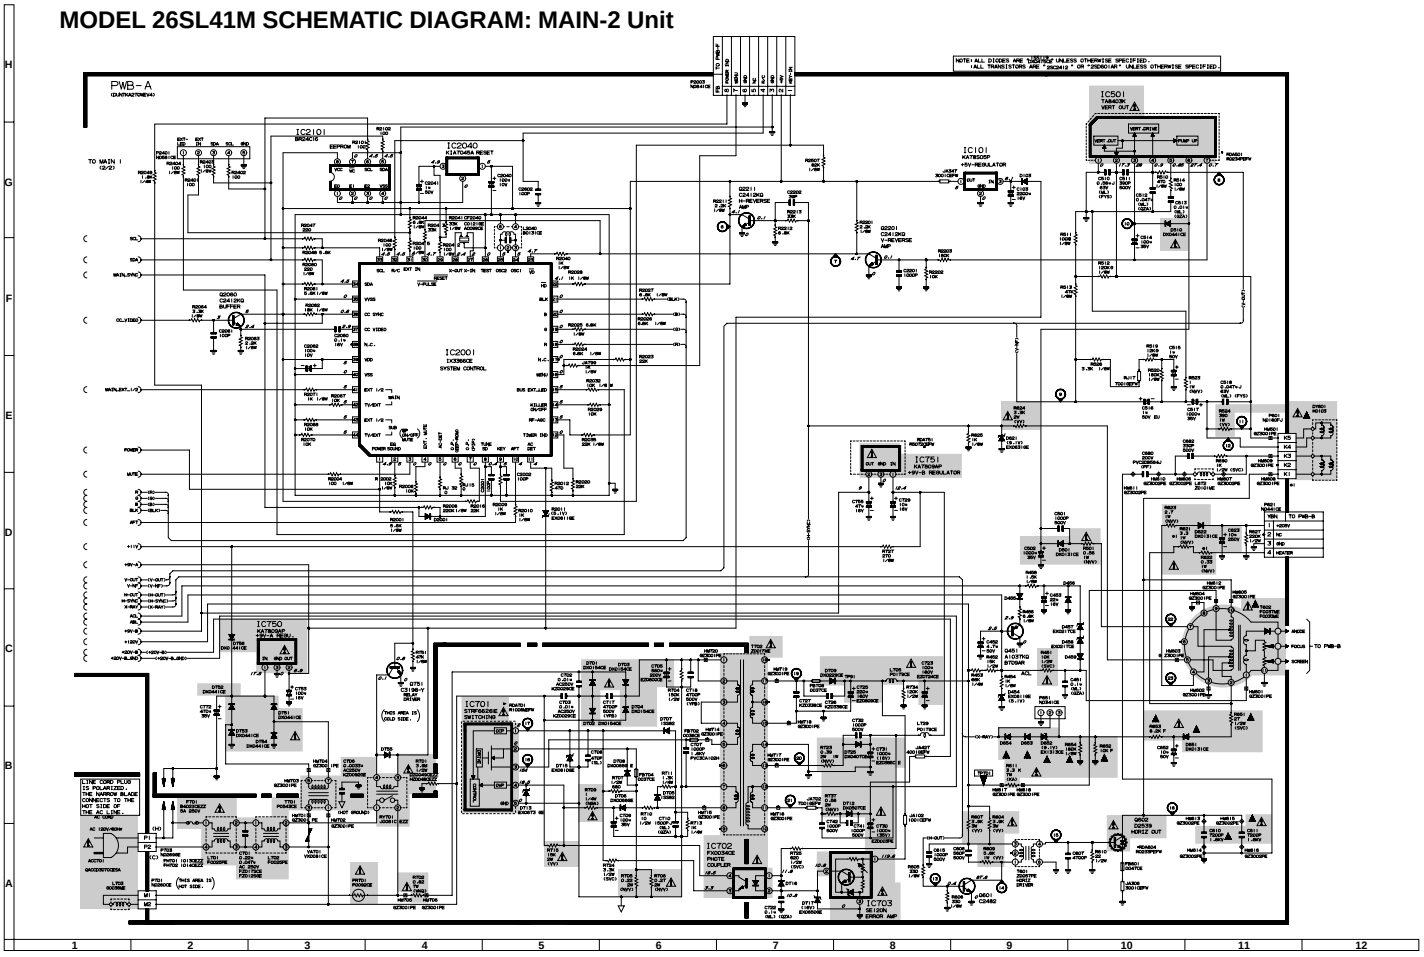

MODEL 26SL71M SCHEMATIC DIAGRAM: MAIN-1 Unit

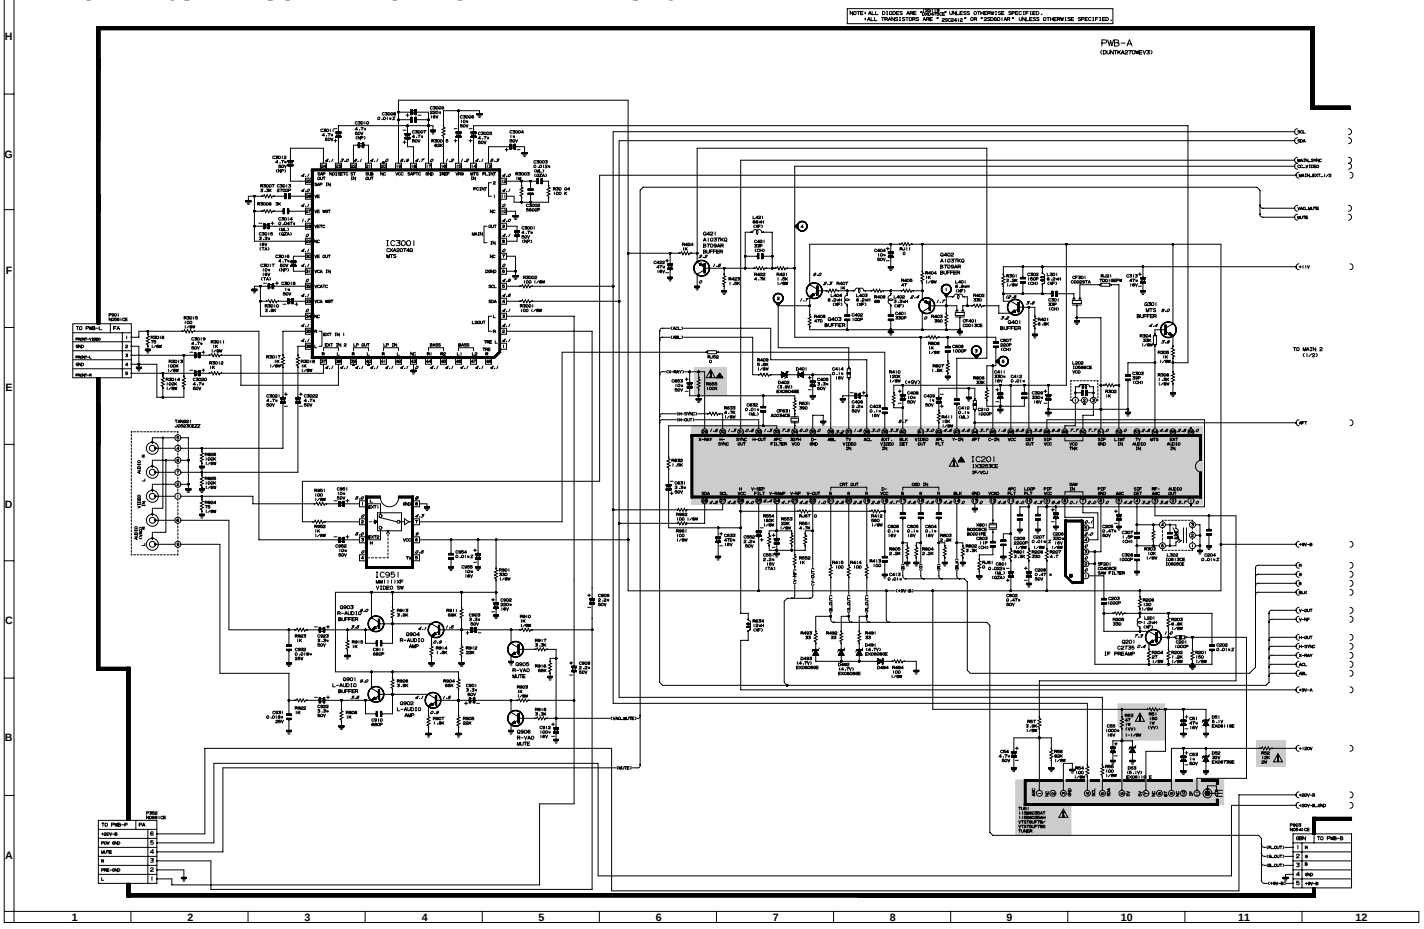

MODEL 26SL71M SCHEMATIC DIAGRAM: MAIN-2 Unit

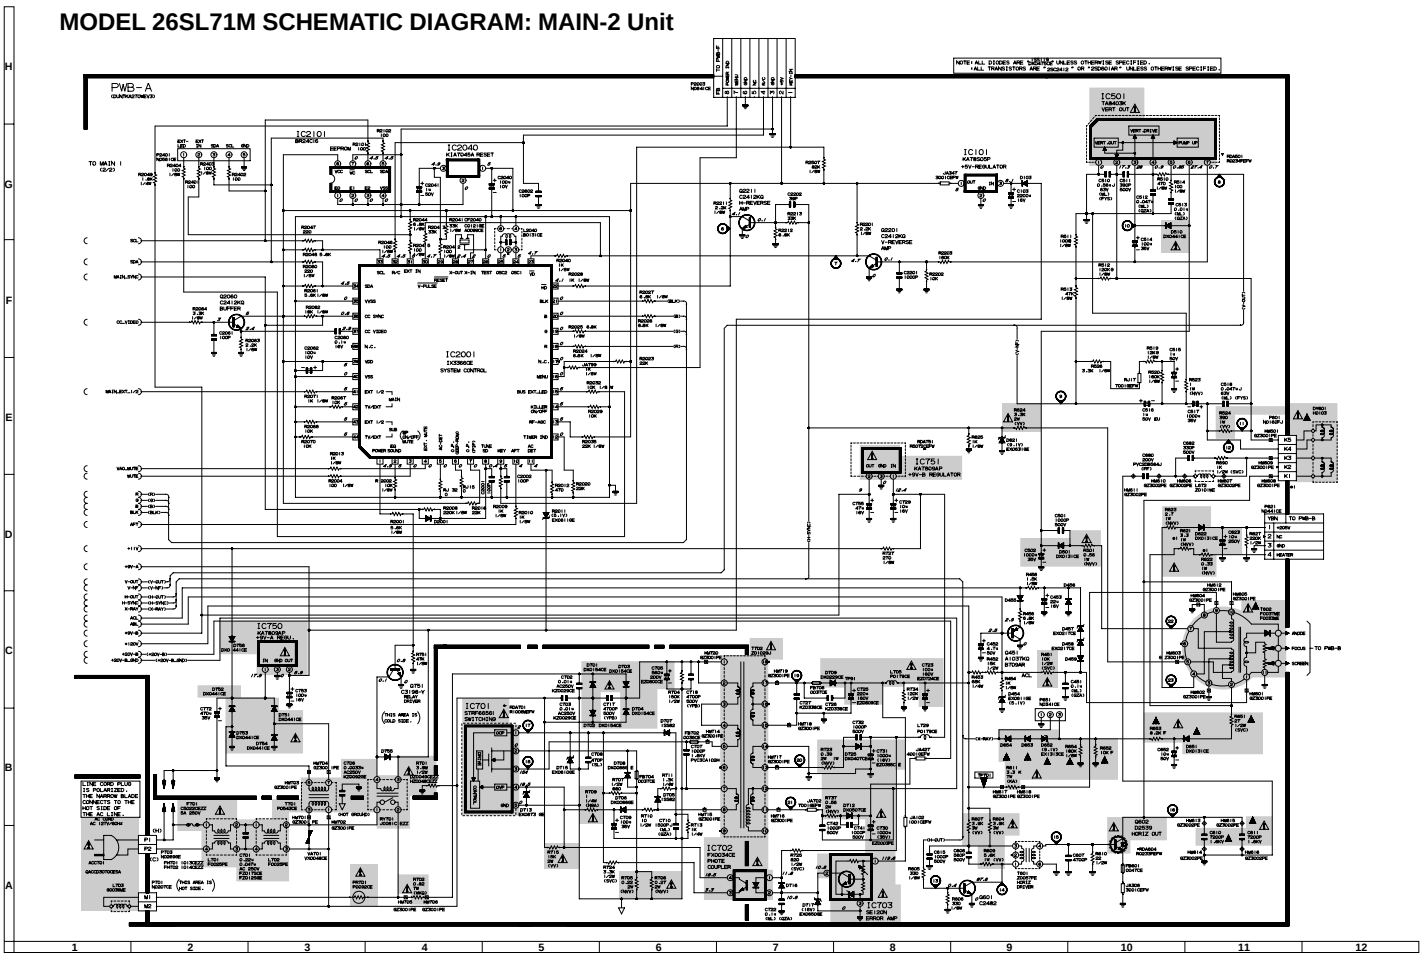

MODEL 29SL81M SCHEMATIC DIAGRAM: MAIN-1 Unit

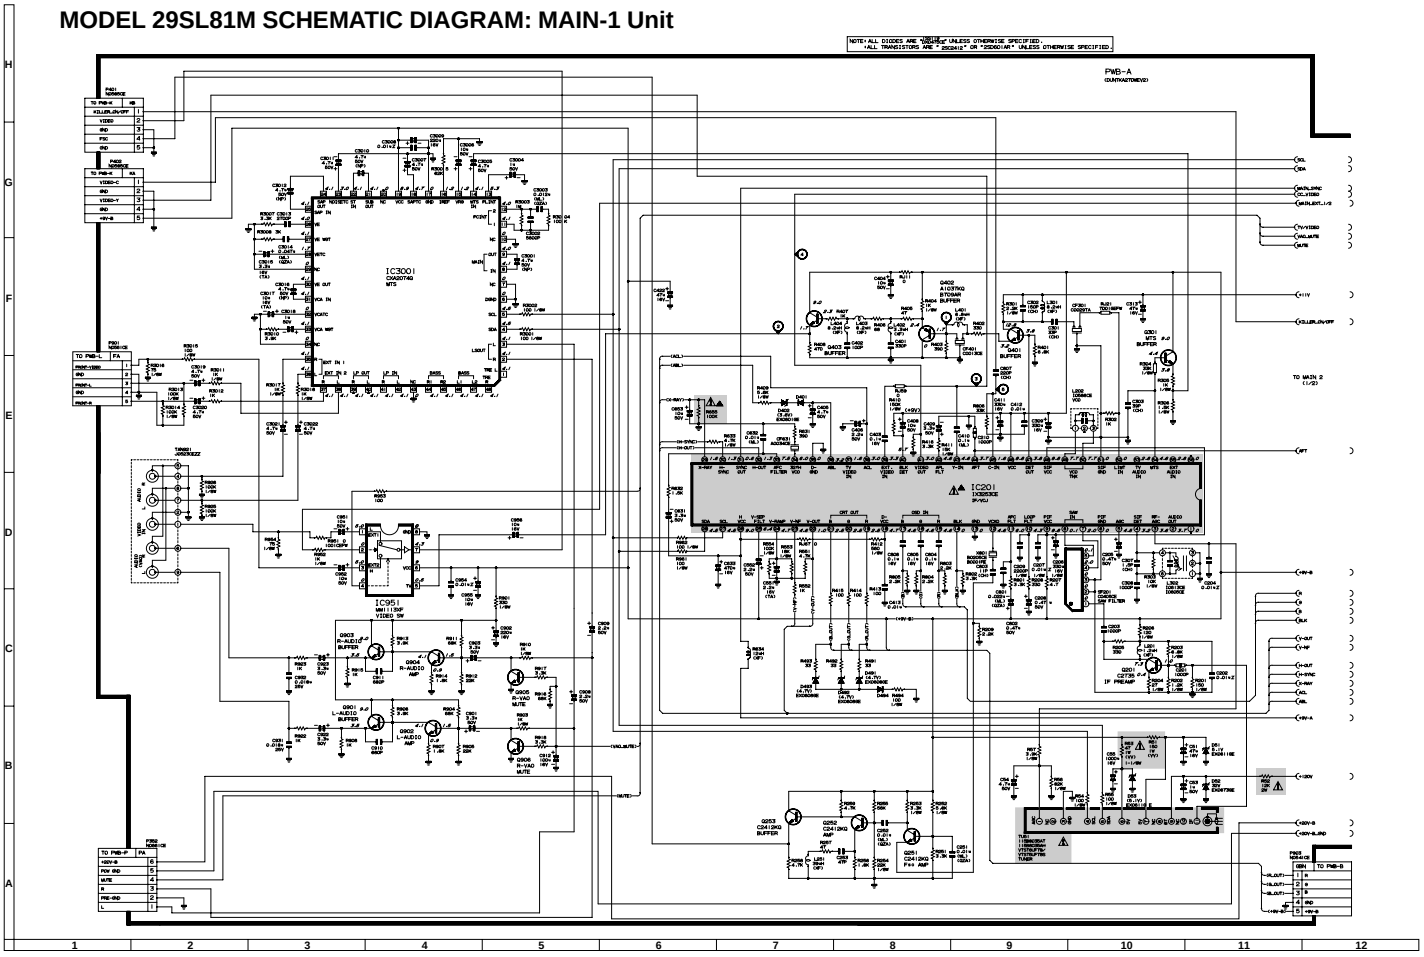

MODEL 29SL81M SCHEMATIC DIAGRAM: MAIN-2 Unit

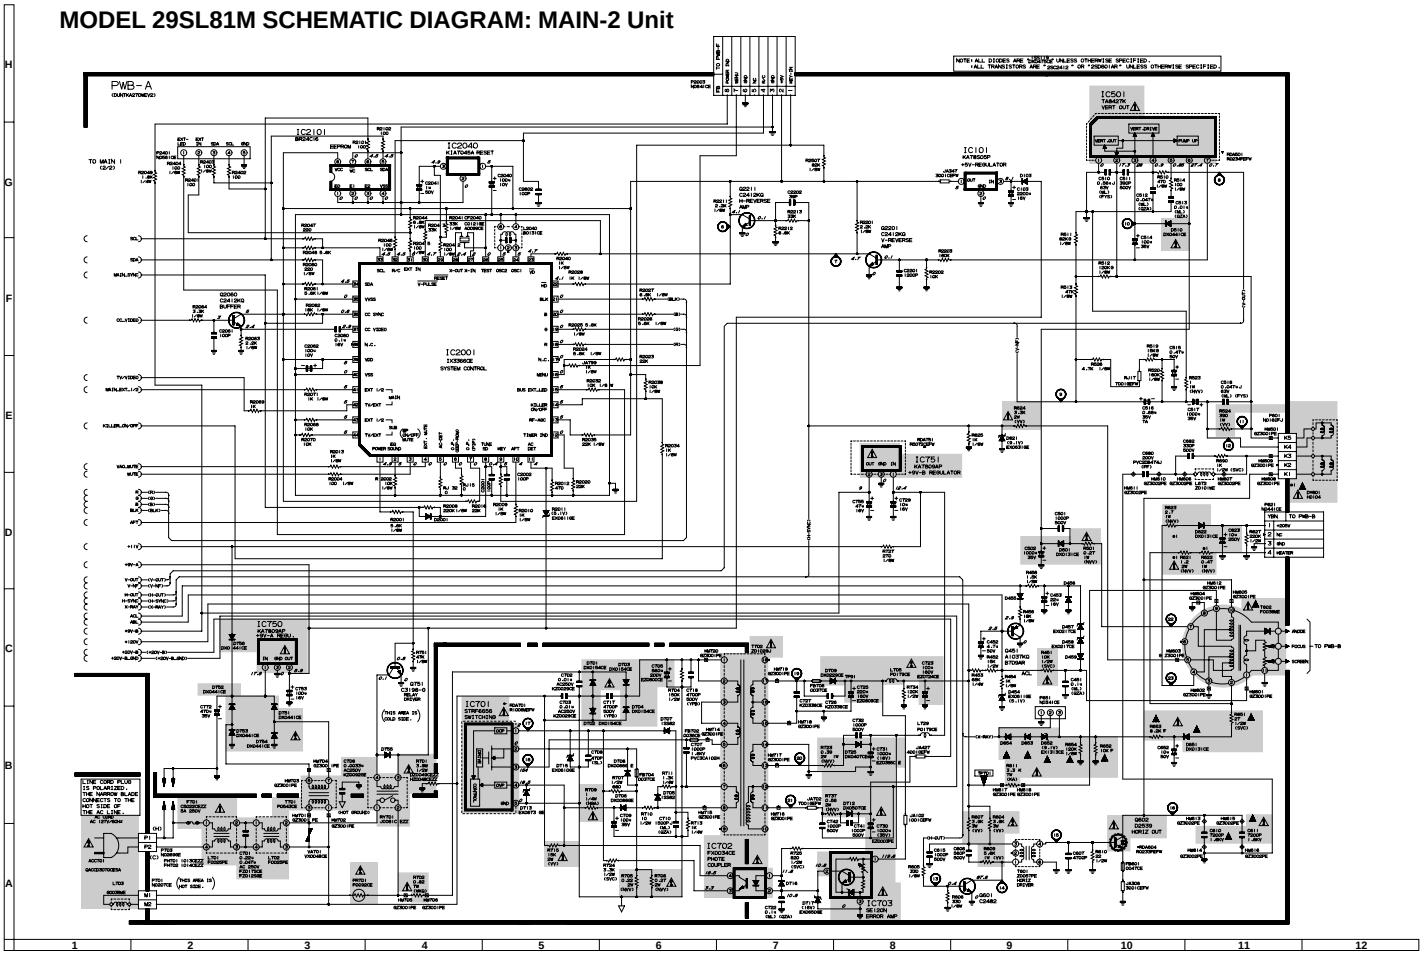

SCHEMATIC DIAGRAM: CRT Unit

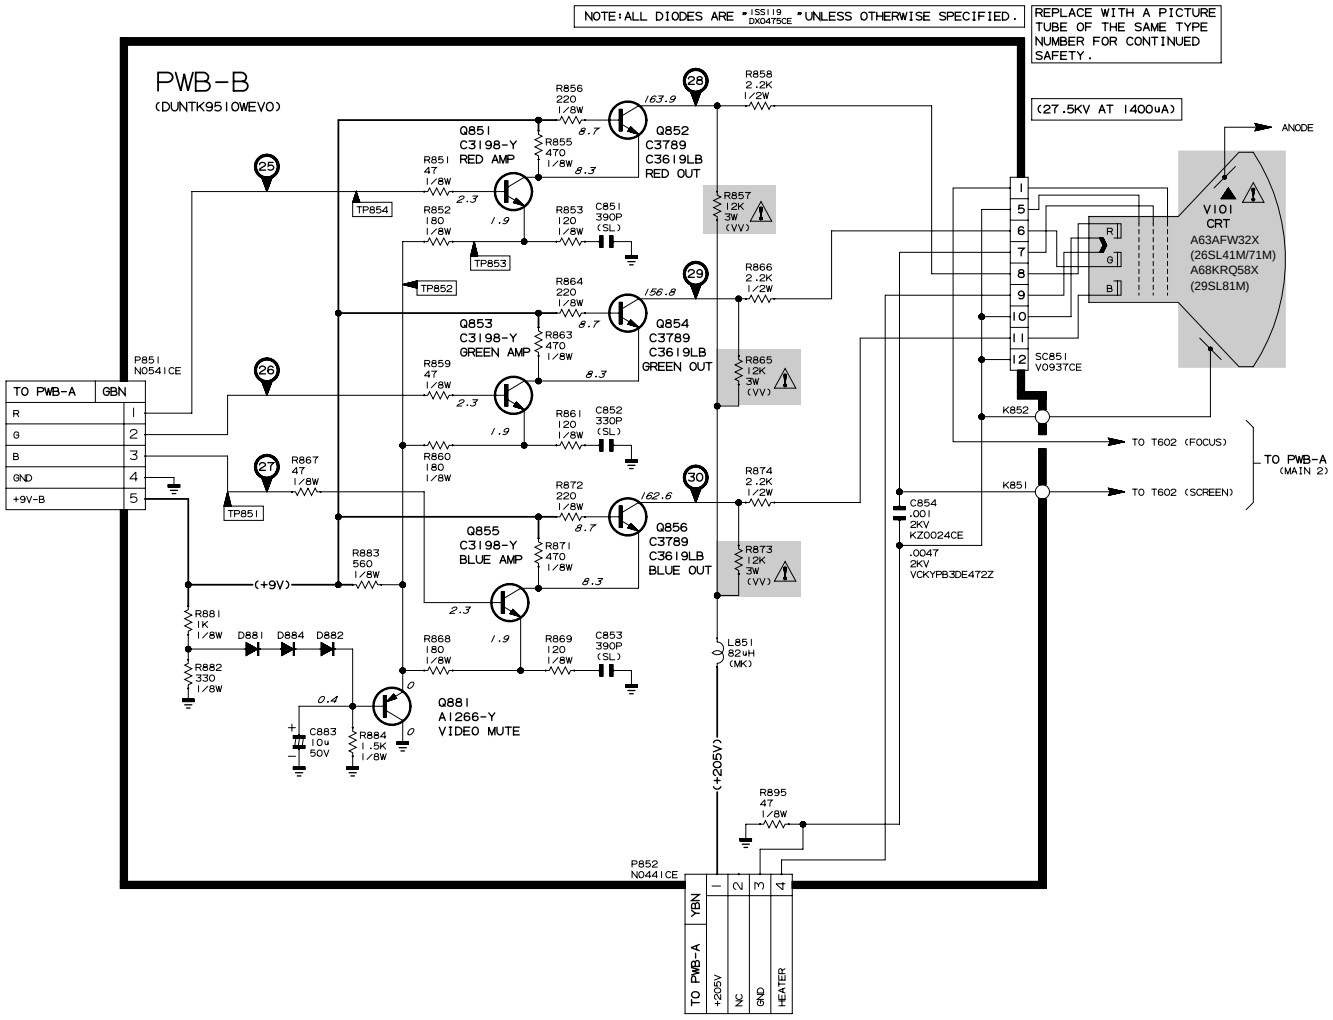

SCHEMATIC DIAGRAM: FRONT AV Unit

MODEL 26SL41M

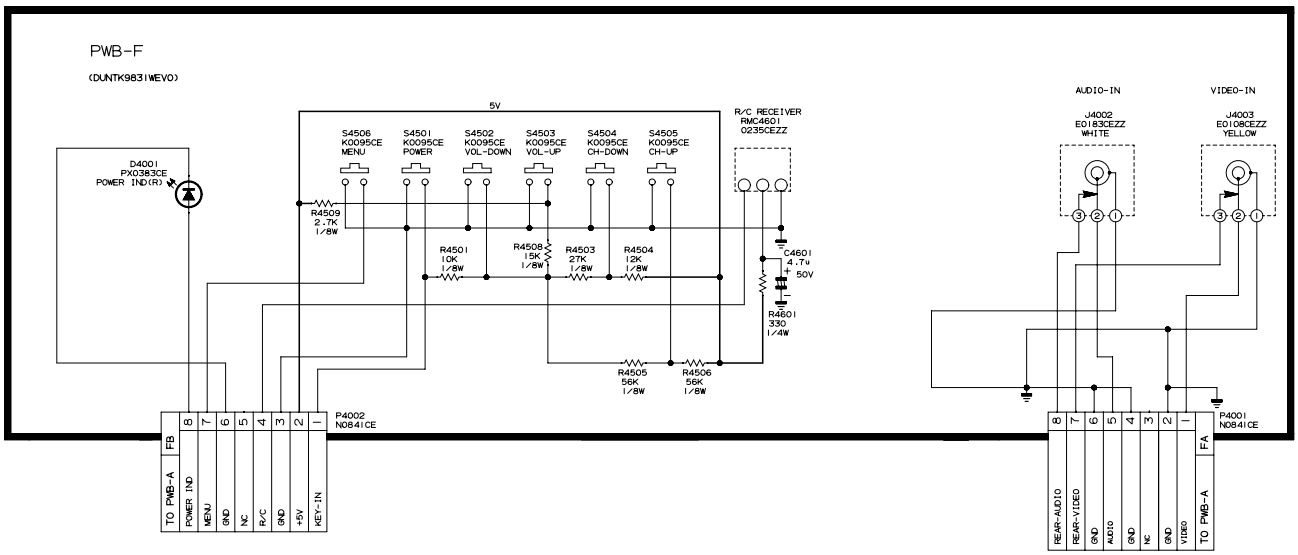

MODELS 26SL71M, 29SL81M

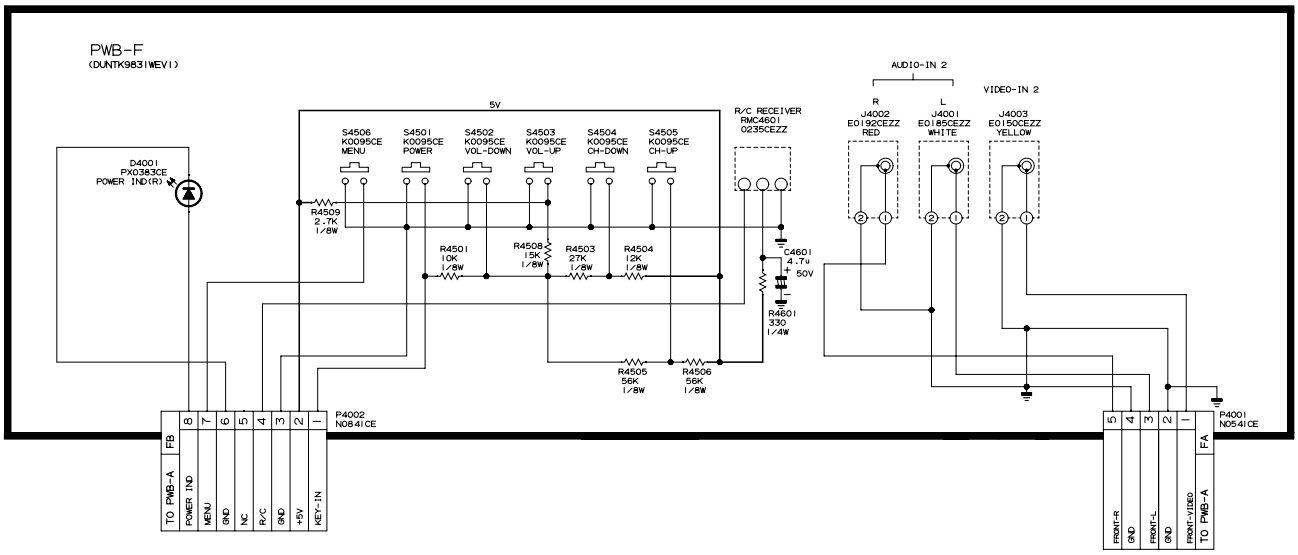

1	2	3	4	5	6

MODEL 26SL71M, 29SL81M SCHEMATIC DIAGRAM: AUDIO OUT Unit

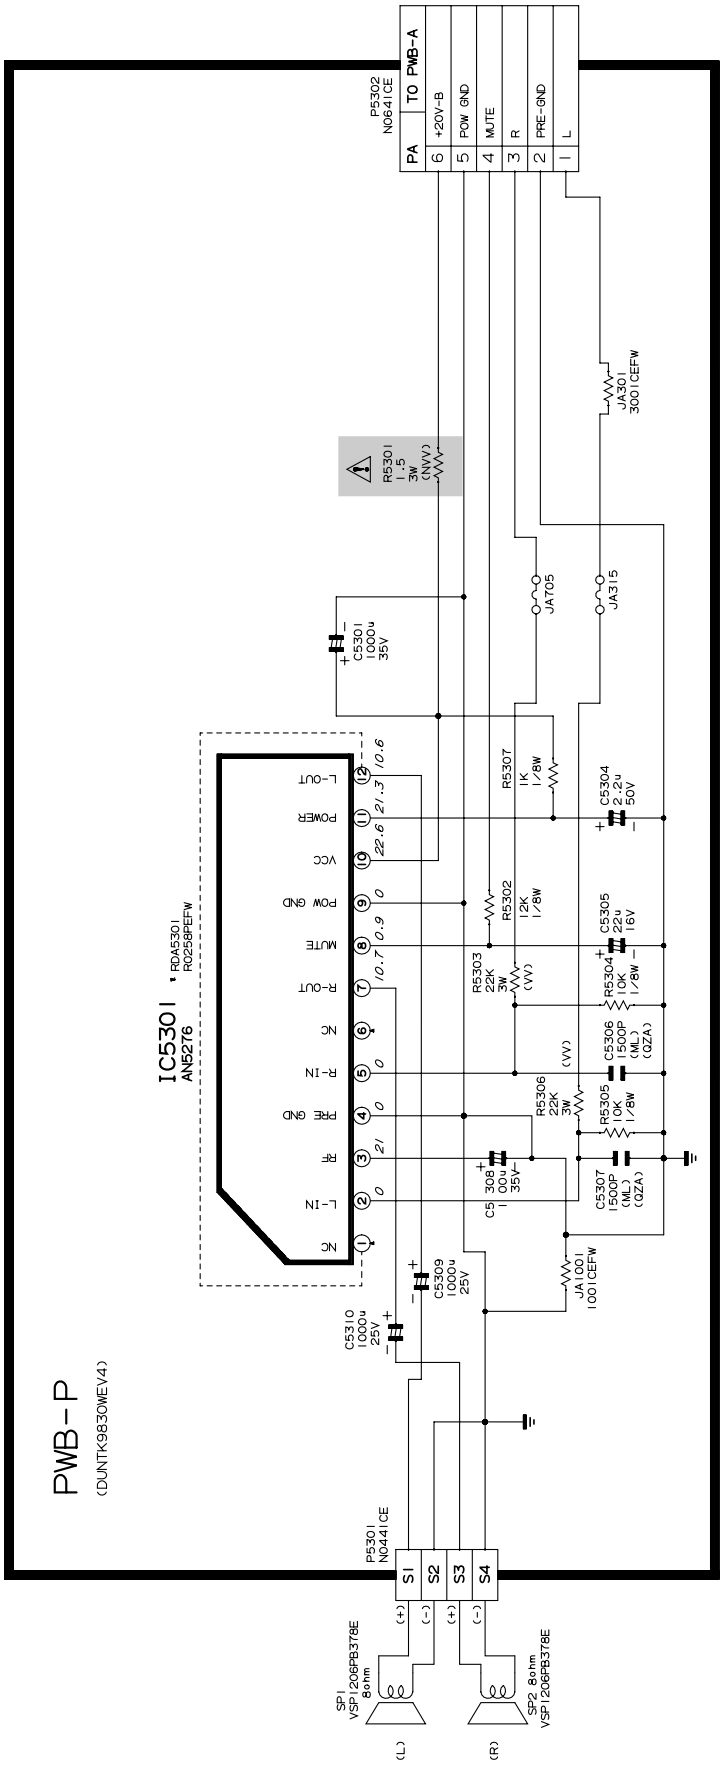

MODEL 29SL81M SCHEMATIC DIAGRAM: Y/C Unit

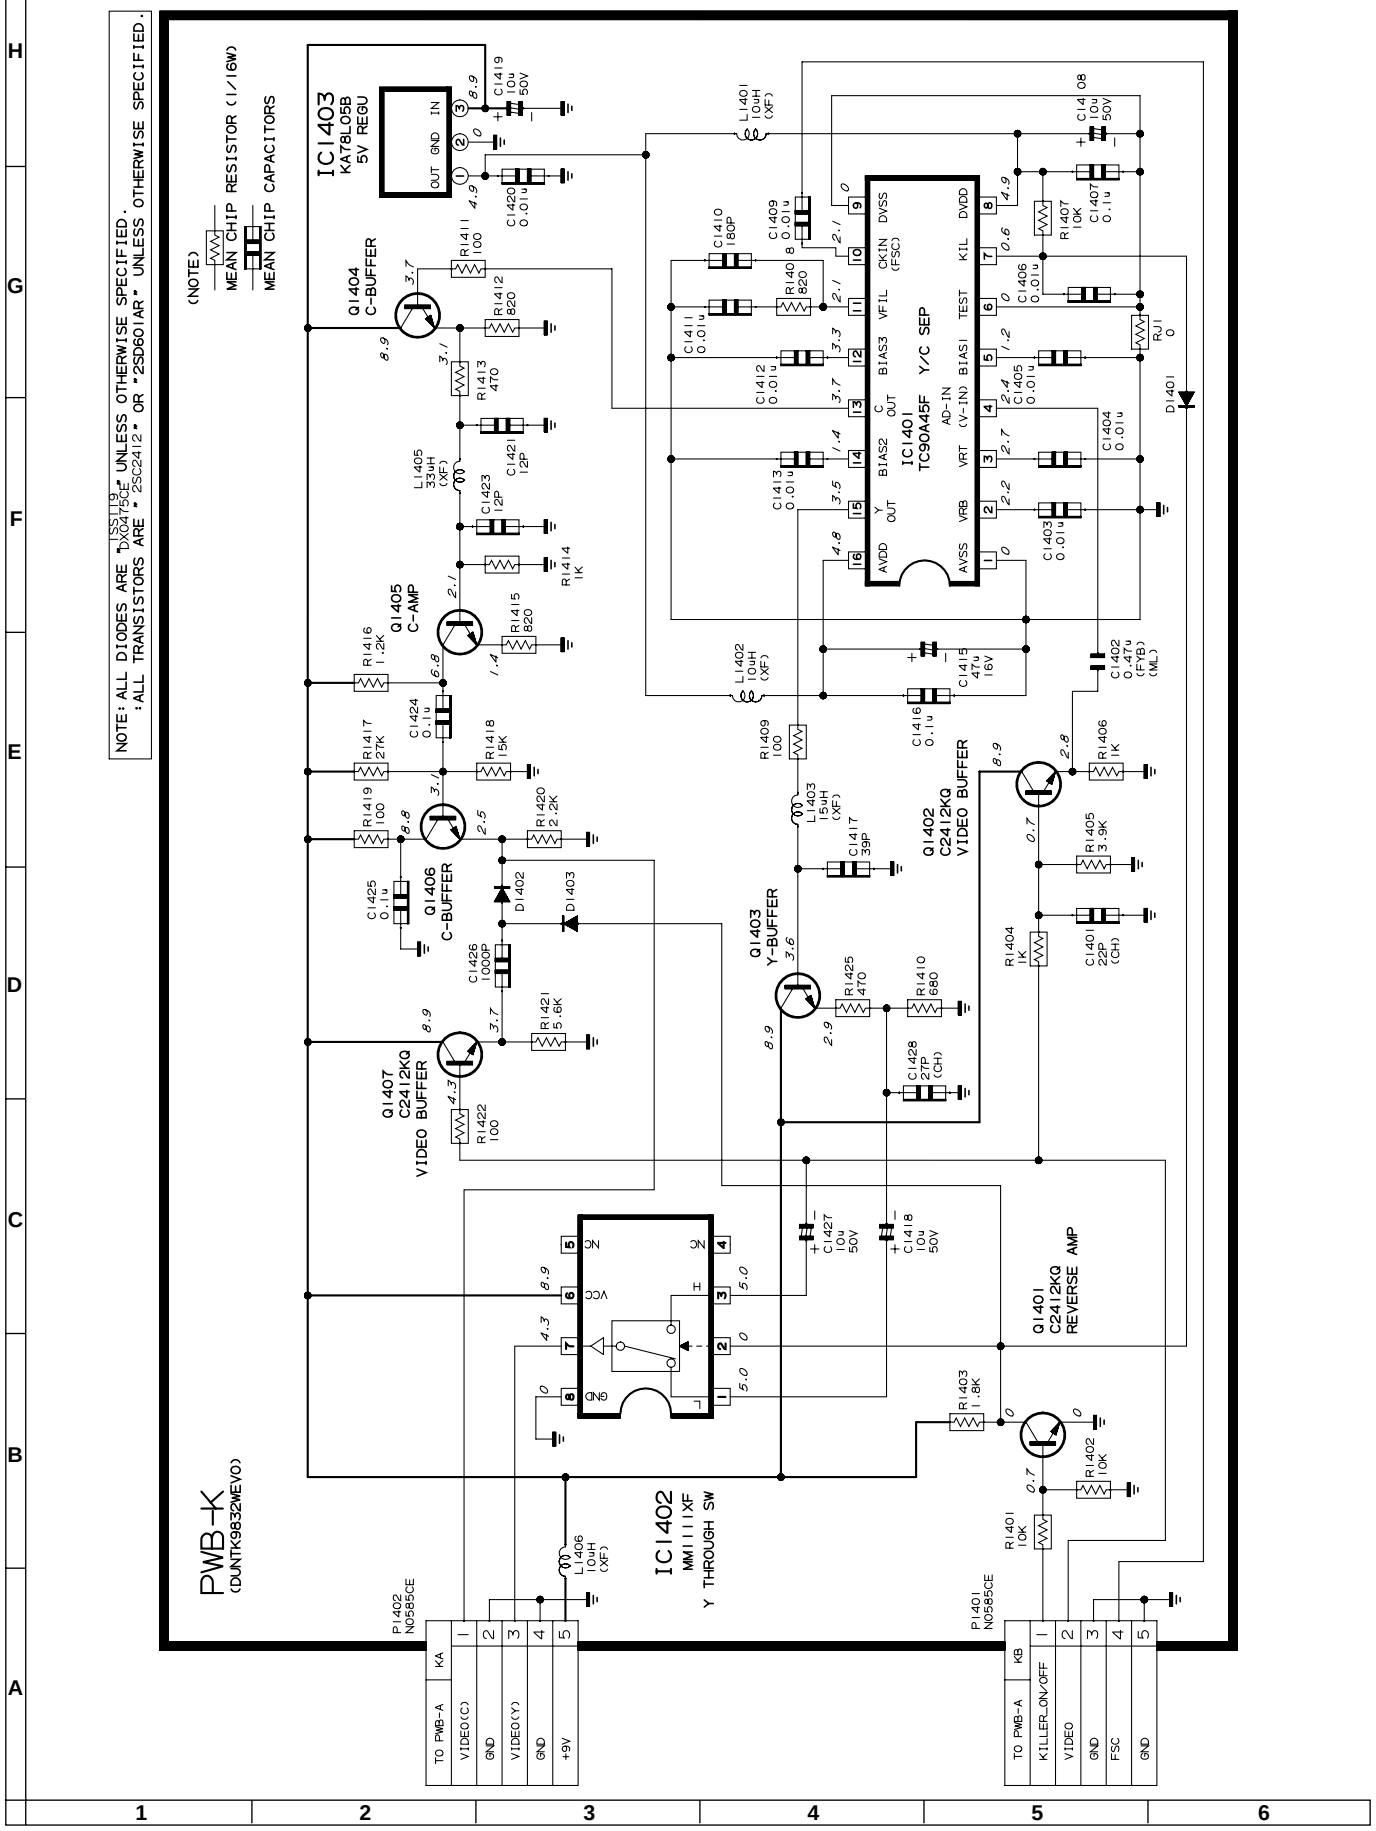

PRINTED WIRING BOARD ASSEMBLIES

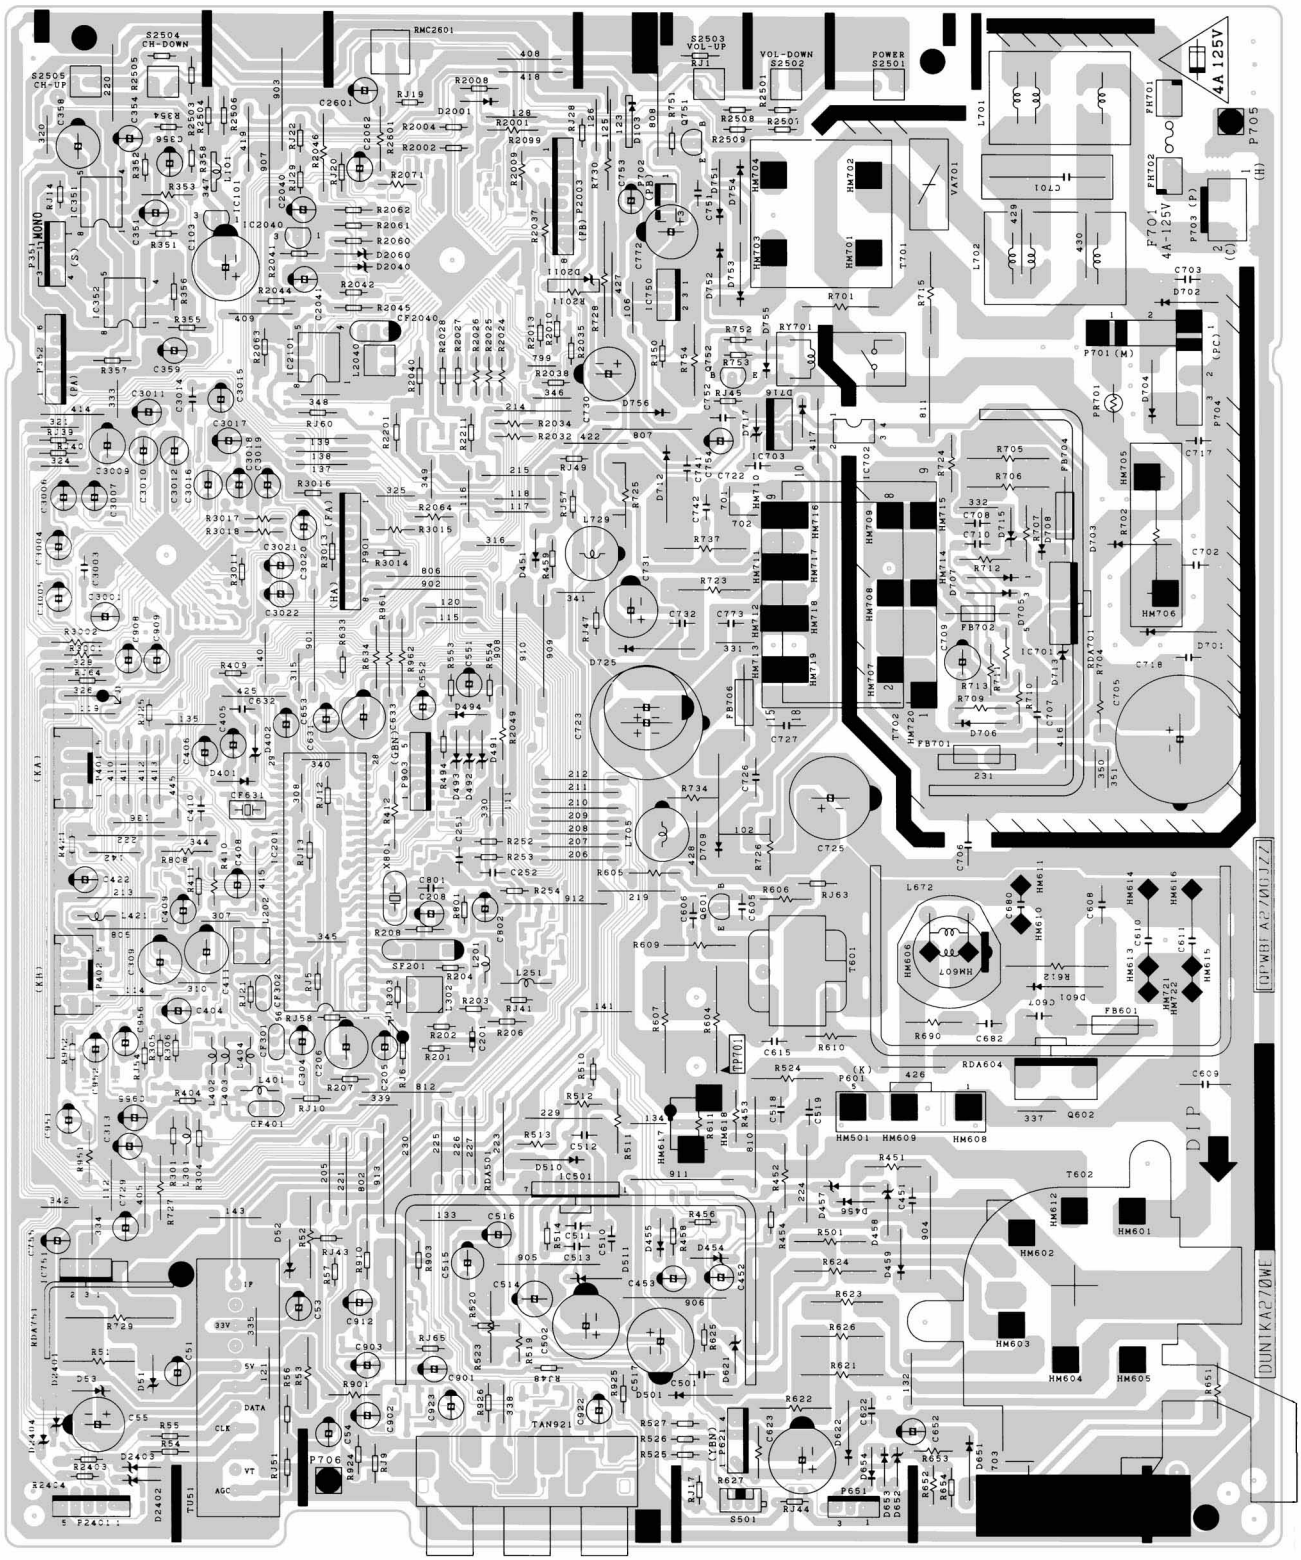

PWB-A: MAIN Unit (Wiring Side)

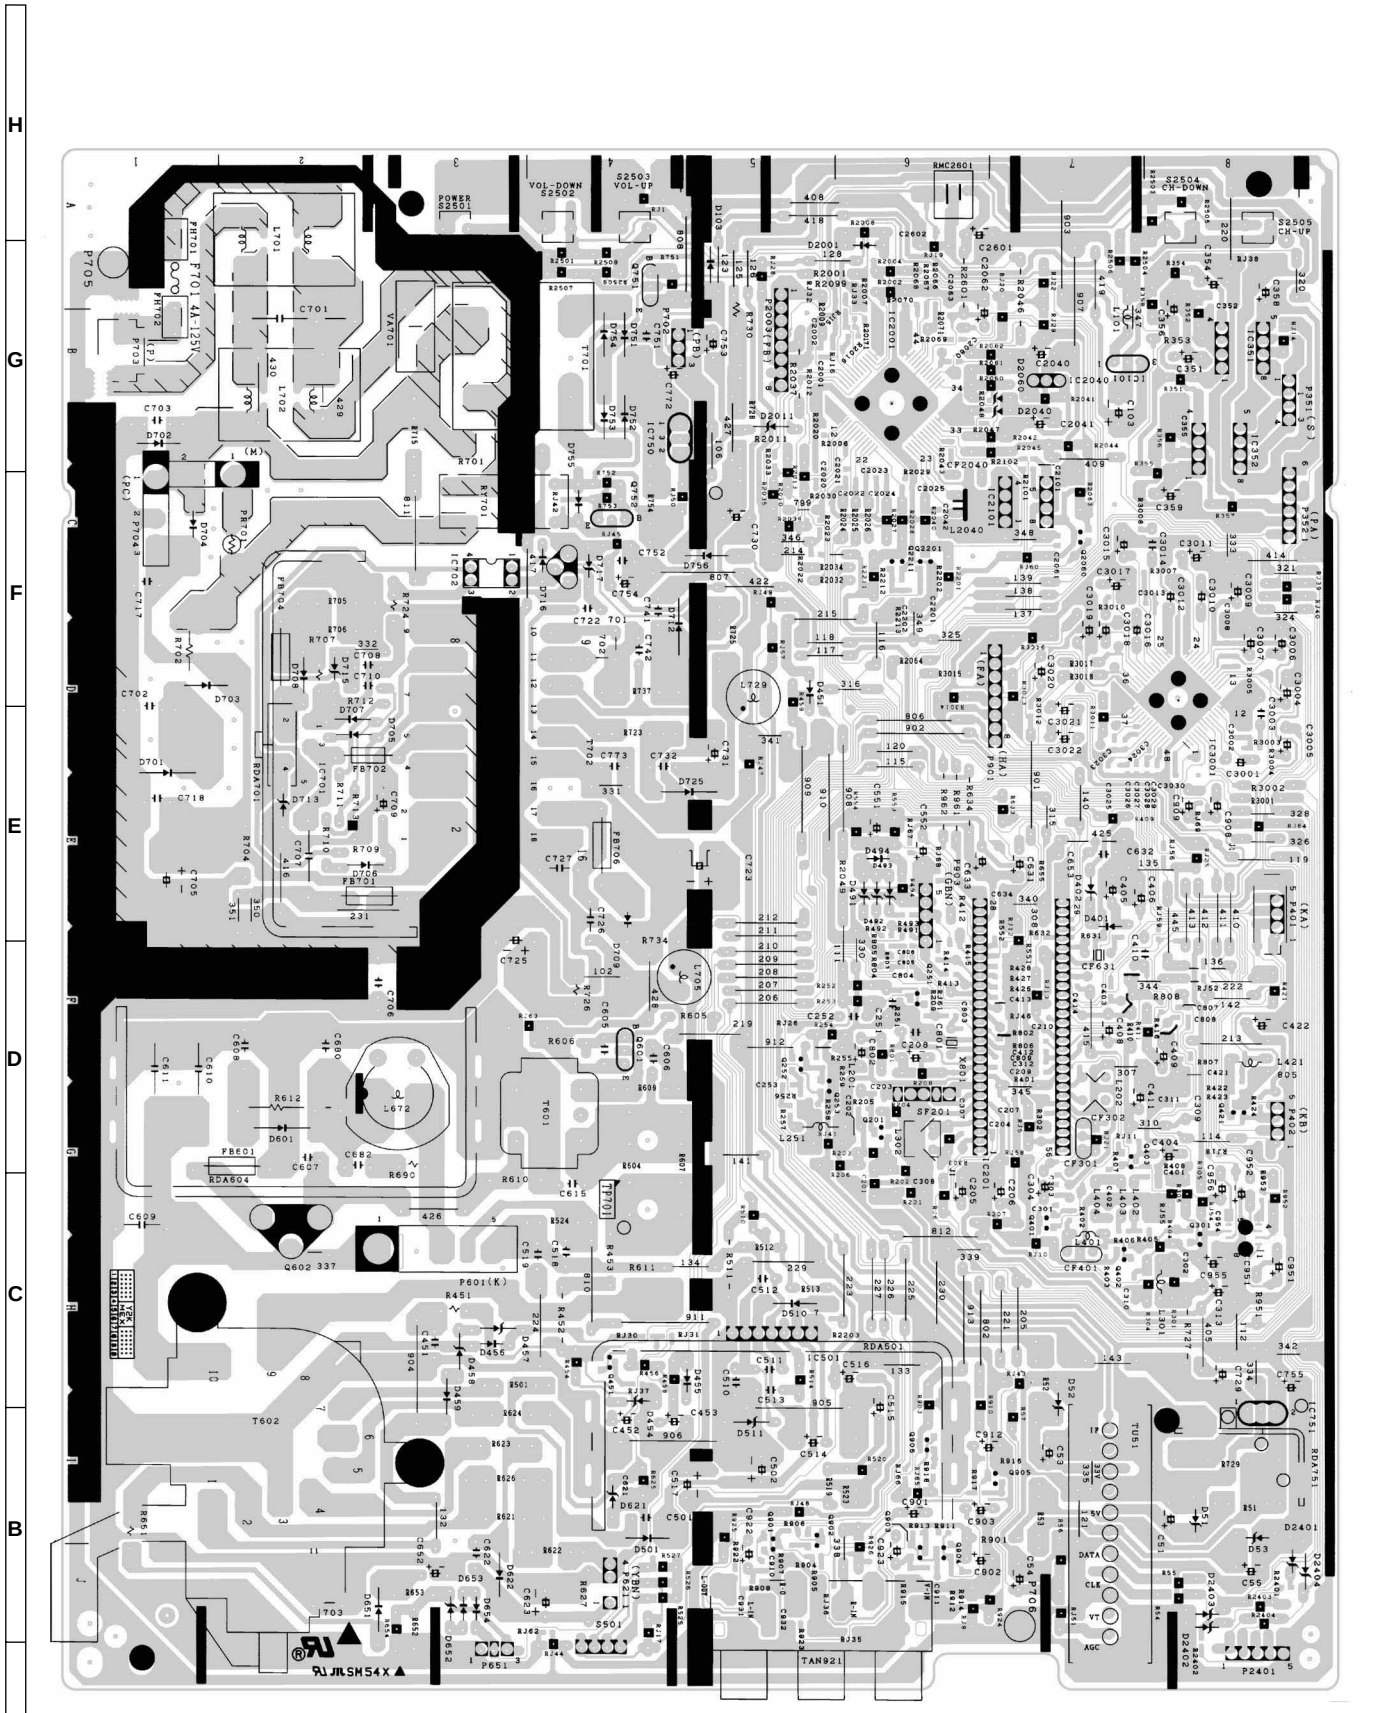

PWB-A: MAIN Unit (Chip Parts Side)

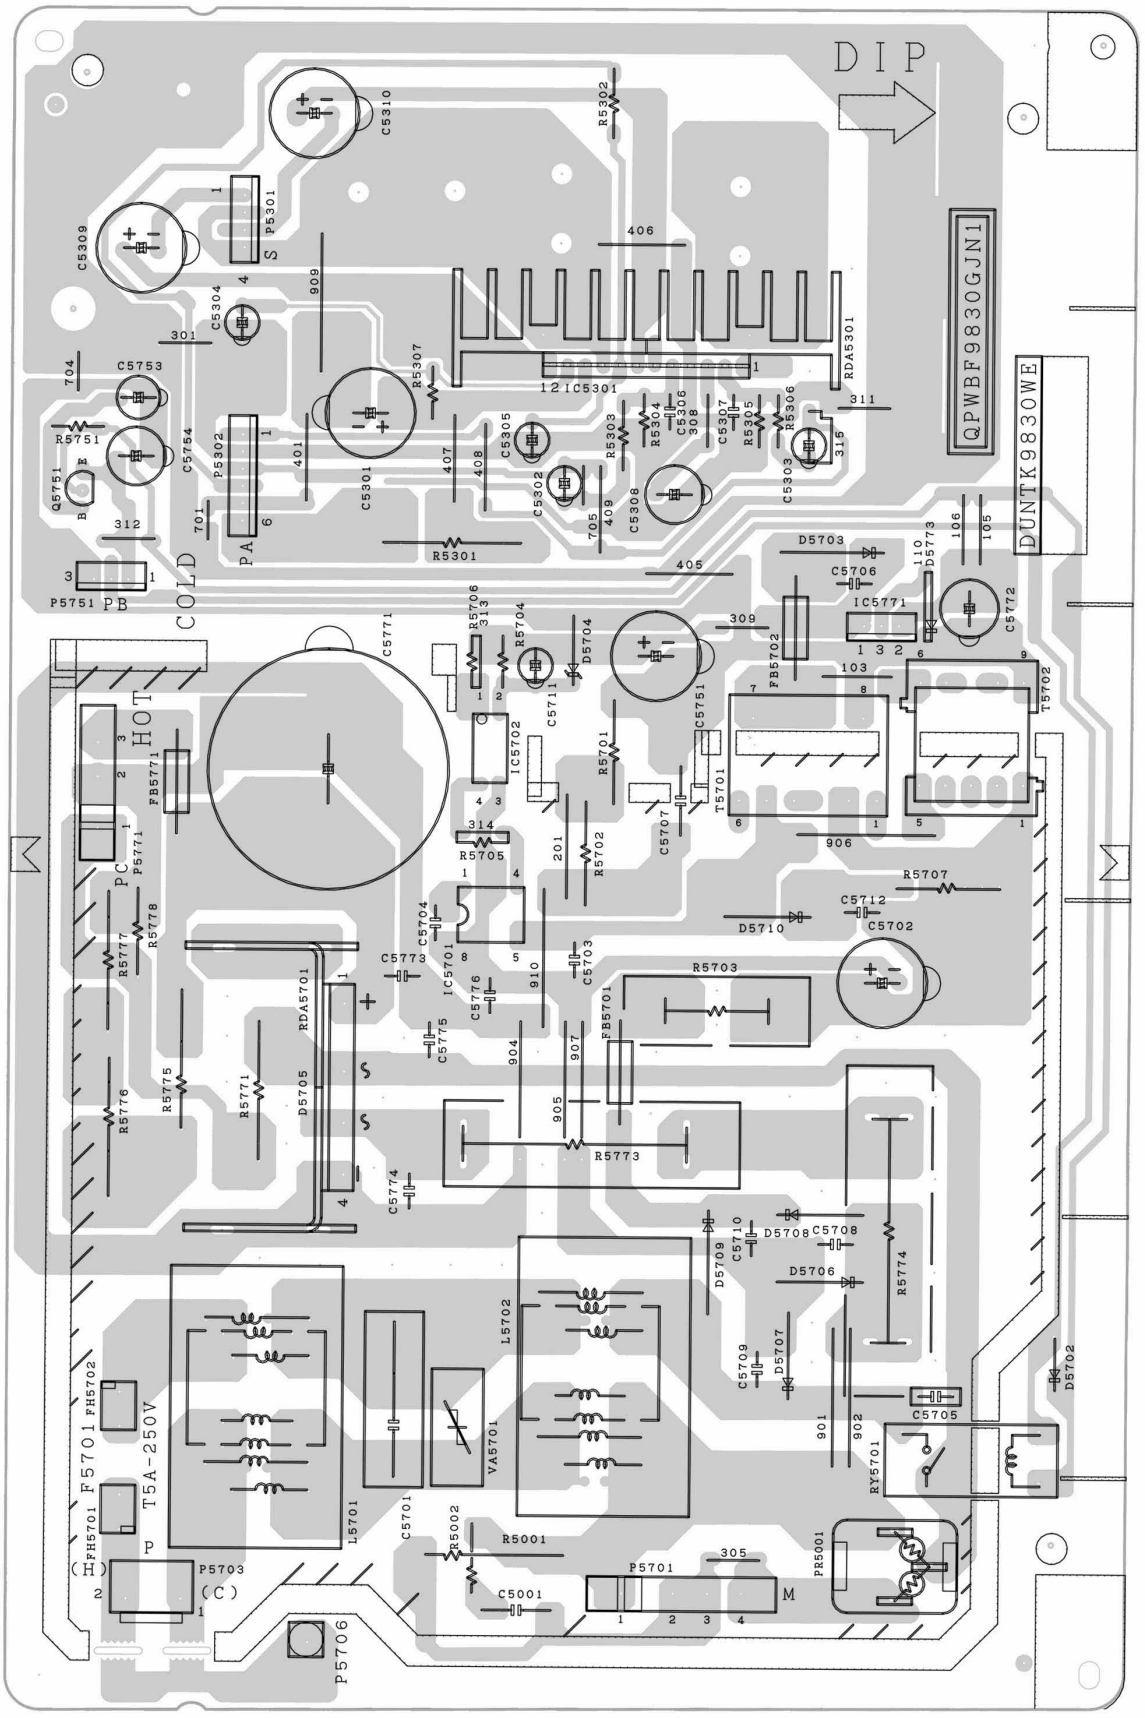

PWB-P: AUDIO OUT Unit (Wiring Side)

(Only for 26SL71M, 29SL81M)

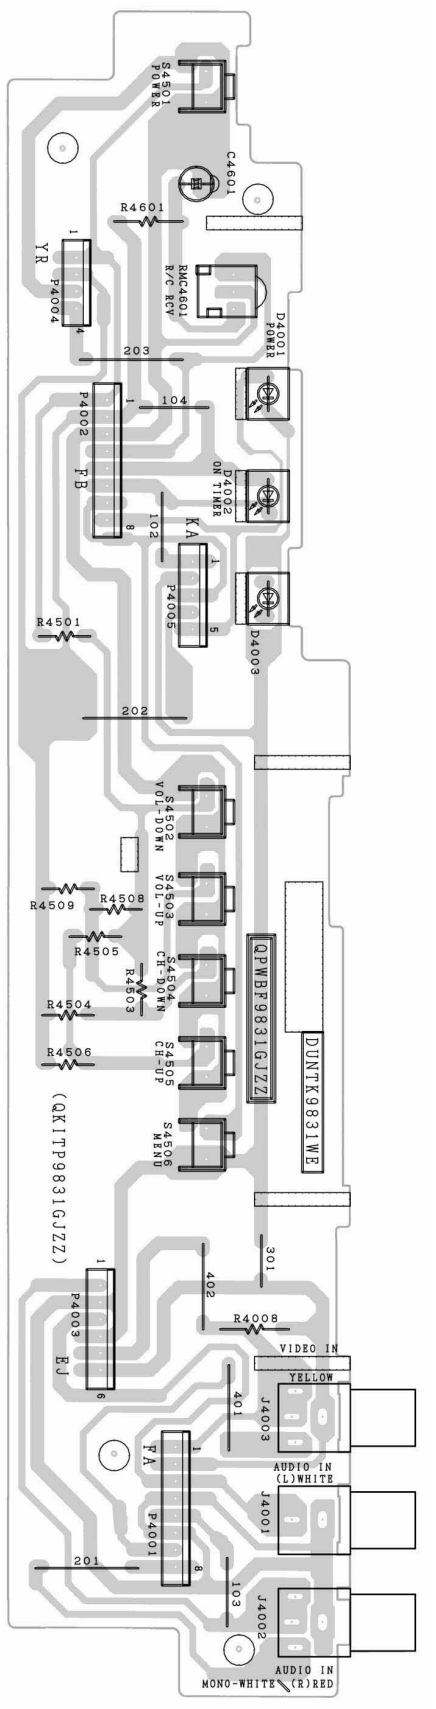

PWB-F: FRONT AV Unit (Wiring Side)

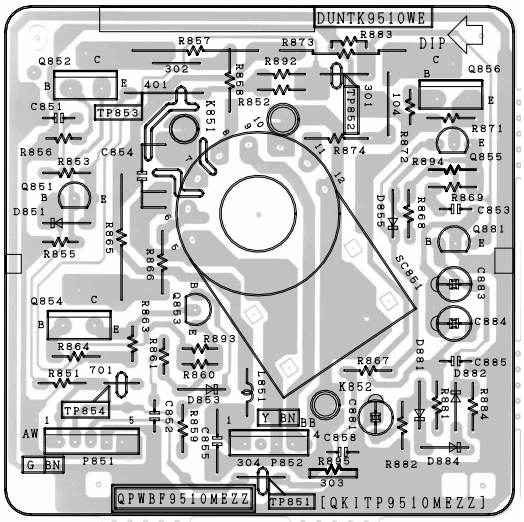

PWB-B: CRT Unit (Wiring Side)

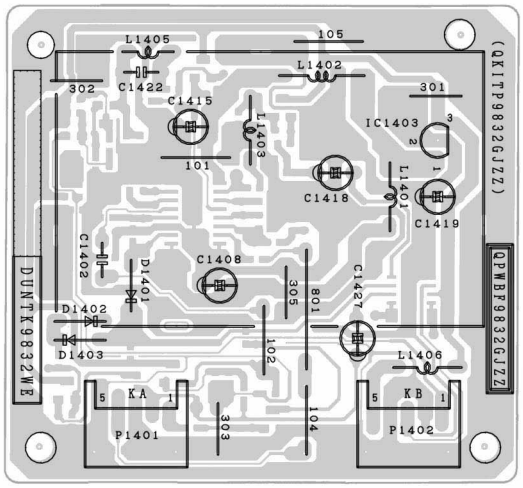

PWB-K: Y/C Unit (Wiring Side)
(Only for 29SL81M)

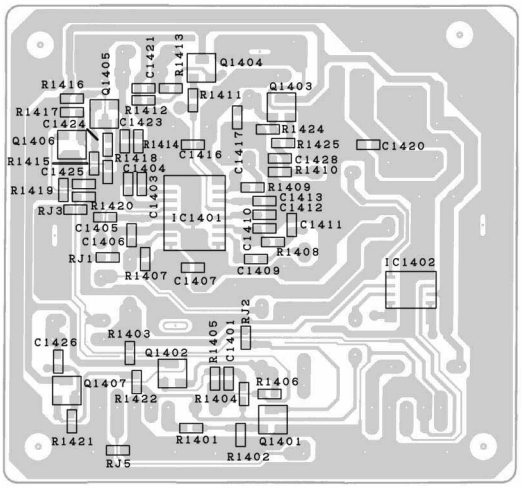

PWB-K: Y/C Unit (Chip Parts Side)
(Only for 29SL81M)

	1	2	3	4	5	6

PARTS LIST

PARTS REPLACEMENT

Replacement parts which have these special safety characteristics identified in this manual; electrical components having such features are identified by ⚠ and shaded areas in the Replacement Parts Lists and Schematic Diagrams. The use of a substitute replacement part which dose no have the same safety characteristic as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

"HOW TO ORDER REPLACEMENT PARTS"

To have your order filled promptly and correctly, please furnish the following informations.

1. MODEL NUMBER
2. REF. NO.
3. PART NO.
4. DESCRIPTION

★ MARK : SPARE PARTS-DELIVERY SECTION

▲ MARK : X- RAY RELATED PARTS

Ref. No.	Part No.	★	Description	Code

PICTURE TUBE

▲⚠	V101	VB63AHC26X/*S	X	Picture Tube (26SL41M, 26SL71M)	CF
▲⚠	V101	VB68KRQ58X/*S	X	Picture Tube (29SL81M)	CK
▲⚠	DY601	RCiLH0103GJZZ	X	Deflection Yoke (26SL41M, 26SL71M)	AZ
▲⚠	DY601	RCiLH0104GJZZ	X	Deflection Yoke (29SL81M)	BE
⚠	L703	RCiLG0036MEZZ	X	Degaussing Coil (26SL71M, 26SL41M)	AN
⚠	L703	RCiLG0038MEZZ	X	Degaussing Coil (29SL81M)	AQ
		MSPRT0002MEZZ	M	Spring for CRT	AA
		PMAGF3046CEZZ	J	Purity Magnet	AE
		QEARC2508MEZZ	X	Grounding Part (26SL41M, 26SL71M)	AG
		QEARC2702MEZZ	M	Grounding Part (29SL81M)	AH

PRINTED WIRING BOARD ASSEMBLIES *(NOT REPLACEMENT ITEM)*

PWB-A	DUNTKA270WEV4	–	MAIN Unit (26SL41M)	—
PWB-A	DUNTKA270WEV3	–	MAIN Unit (26SL71M)	—
PWB-A	DUNTKA270WEV2	–	MAIN Unit (29SL81M)	—
PWB-B	DUNTK9510WEV0	–	CRT Unit	—
PWB-F	DUNTK9831WEV0	–	FRONT AV Unit (26SL41M)	—
PWB-F	DUNTK9831WEV1	–	FRONT AV Unit (26SL71M, 29SL81M)	—
PWB-K	DUNTK9832WEV0	–	Y/C Unit (29SL81M)	—
PWB-P	DUNTK9830WEV4	–	AUDIO OUT Unit (26SL71M, 29SL81M)	—

Ref. No.	Part No.	★	Description	Code

PWB-A: DUNTA270WEV4 (26SL41M)
PWB-A: DUNTA270WEV3 (26SL71M)
PWB-A: DUNTA270WEV2 (29SL81M)
MAIN UNIT

TUNER

NOTE : THE PARTS HERE SHOWN ARE SUPPLIED AS AN ASSEMBLY BUT NOT INDEPENDENTLY.

⚠	TU51	VTU115B8035AH or VTU115B8035AT or VTUVTST6UF78/ or VTUVTST5UF78S	M	VHF Tuner	AH

INTEGRATED CIRCUITS

	IC101	VHiKA78S05P-1	J	KA78S05P	AD
▲⚠	IC201	RH-iX3253CEZZ	J	TA1268AN	AV
	IC351	VHiAN7511//-1	J	AN7511 (26SL41M)	AK
	IC352	VHiAN7511//-1	J	AN7511 (26SL41M)	AK
⚠	IC501	VHiTA8403K/-1	J	TA8403K (26SL41M, 26SL71M)	AL
⚠	IC501	VHiTA8427K/-1	J	TA8427K (29SL81M)	AL
⚠	IC701	VHiSTRF66261E	J	STRF6626 (26SL41M)	AX
	IC701	VHiSTRF66561E	J	STRF6656 (26SL71M, 29SL81M)	
⚠	IC702	RH-FX0034CEZZ	J	PC817	AE
⚠	IC703	VHiSE120N//-1	J	SE120N	AG
⚠	IC750	VHiKA7809AP-1	J	KA7809AP	AE
⚠	IC751	VHiKA7809AP-1	J	KA7809AP	AE
	IC951	VHiMM1111XF1E	J	MM1111XF (26SL71M)	AE
	IC951	VHiMM1113XF1E	J	MM1113XF (29SL81M)	AE
	IC2001	RH-iX3366CEN2	X	TMPA8700CPF (26SL41M)	AT
	IC2001	RH-iX3366CEZZ	X	TMPA8700CPF (26SL71M, 29SL81M)	AU
	IC2040	VHiKiA7045A-1	M	KIA7045A	AC
	IC2101	VHiBR24C16/-1	J	BR24C16	AL
	IC3001	VHiCXA2074Q-1	J	CXA2074Q (26SL71M, 29SL81M)	AY

TRANSISTORS

You can substitute "VS2SD601AR/-1" for "VS2SC2412KQ-1".

	Q201	VS2SC2735//1E	J	2SC2735	AC
	Q251	VS2SC2412KQ-1	J	2SC2412 (29SL81M)	AA
	Q252	VS2SC2412KQ-1	J	2SC2412 (29SL81M)	AA
	Q253	VS2SC2412KQ-1	J	2SC2412 (29SL81M)	AA
	Q301	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA
	Q401	VS2SC2412KQ-1	J	2SC2412	AA
	Q402	VS2SA1037KQ-1 or VS2SB709AR/-1	J	2SA1037	AA
	Q403	VS2SC2412KQ-1	J	2SC2412	AA
	Q421	VS2SA1037KQ-1 or VS2SB709AR/-1	J	2SA1037 (26SL41M, 26SL71M)	AA
	Q451	VS2SA1037KQ-1 or VS2SB709AR/-1	J	2SA1037	AA
	Q601	VS2SC2482//-1	J	2SC2482	AD
⚠	Q602	VS2SD2539//1E	J	2SD2589	AP
	Q751	VS2SC3198-G-1	J	2SC3198 (29SL81M)	AA
	Q751	VS2SC3198-Y-1	J	2SC3198 (26SL41M, 26SL71M)	AA
	Q901	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA
	Q902	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA
	Q903	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA
	Q904	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA

Ref. No.	Part No.	★	Description	Code

PWB-A: DUNTA270WEV4 (26SL41M)
PWB-A: DUNTA270WEV3 (26SL71M)
PWB-A: DUNTA270WEV2 (29SL81M)
MAIN UNIT (Continued)

Q905	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA
Q906	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA
Q2060	VS2SC2412KQ-1	J	2SC2412	AA
Q2201	VS2SC2412KQ-1	J	2SC2412	AA
Q2211	VS2SC2412KQ-1	J	2SC2412	AA

DIODES

You can substitute "RH-DX0475CEZZ" for "VHD1SS119//-1".

D51	RH-EX0611GEZZ	J	Zener Diode, 5.1V	AA
D52	RH-EX0673GEZZ	J	Zener Diode, 32V	AB
D53	RH-EX0611GEZZ	J	Zener Diode, 5.1V	AA
D103	VHD1SS119//-1	J	Diode	AB
D401	VHD1SS119//-1	J	Diode	AB
D402	RH-EX0601GEZZ	J	Zener Diode, 3.6V (29SL81M)	AA
D402	RH-EX0604GEZZ	J	Zener Diode, 3.9V (26SL41M, 26SL71M)	AB
D454	RH-EX0611GEZZ	J	Zener Diode, 5.1V	AA
D455	VHD1SS119//-1	J	Diode	AB
D456	VHD1SS119//-1	J	Diode	AB
D457	RH-EX0217CEZZ	J	Zener Diode, 15V	AB
D458	RH-EX0217CEZZ	J	Zener Diode, 15V	AB
D459	VHD1SS119//-1	J	Diode	AB
D491	RH-EX0608GEZZ	J	Zener Diode	AA
D492	RH-EX0608GEZZ	J	Zener Diode	AA
D493	RH-EX0608GEZZ	J	Zener Diode	AA
D494	VHD1SS119//-1	J	Diode	AB
⚠ D501	RH-DX0131CEZZ	J	Diode	AC
⚠ D510	RH-DX0441CEZZ	J	Diode	AC
D621	RH-EX0631GEZZ	J	Zener Diode, 9.1V	AA
⚠ D622	RH-DX0131CEZZ	J	Diode	AC
▲⚠ D651	RH-DX0131CEZZ	J	Diode	AC
▲⚠ D652	RH-EX1313CEZZ	J	Zener Diode, 9.1V	AD
▲⚠ D653	VHD1SS119//-1	J	Diode	AB
▲⚠ D654	VHD1SS119//-1	J	Diode	AB
⚠ D701	RH-DX0154CEZZ	J	Diode	AC
⚠ D702	RH-DX0154CEZZ	J	Diode	AC
⚠ D703	RH-DX0154CEZZ	J	Diode	AC
⚠ D704	RH-DX0154CEZZ	J	Diode	AC
D705	VHD1SS82///1A	J	Diode	AC
D706	RH-DX0066GEZZ	J	Diode	AB
D707	VHD1SS82///1A	J	Diode	AC
D708	RH-DX0066GEZZ	J	Diode	AB
⚠ D709	RH-DX0229CEZZ	J	Diode	AF
⚠ D712	RH-DX0407CEZZ	J	Diode (26SL41M)	AD
⚠ D712	RH-DX0507CEZZ	J	Diode (26SL71M, 29SL81M)	AB
D713	RH-EX0673GEZZ	J	Zener Diode, 30V	AB
D715	RH-EX0610GEZZ	J	Zener Diode, 4.7V	AA
D716	VHD1SS119//-1	J	Diode	AB
D717	RH-EX0650GEZZ	J	Zener Diode, 16V	AB
⚠ D725	RH-DX0407CEZZ	J	Diode	AD
⚠ D751	RH-DX0441CEZZ	J	Diode	AB
⚠ D752	RH-DX0441CEZZ	J	Diode	AB
⚠ D753	RH-DX0441CEZZ	J	Diode	AB
⚠ D754	RH-DX0441CEZZ	J	Diode	AB
D755	VHD1SS119//-1	J	Diode	AB
⚠ D756	RH-DX0441CEZZ	J	Diode	AC
D2001	VHD1SS119//-1	J	Diode	AB
VA701	RH-VX0048CEZZ	J	Varistor	AE

PACKAGED CIRCUITS

⚠ PR701	RMPTP0092CEZZ	J	Packaged Circuit	AH
X801	RCRSB0205CEZZ or RCRSB0001PEZZ	J	Crystal	AF

FILTERS AND COILS

CF301	RFiLC0029TAZZ	J	Ceramic Filter	AD
CF401	RFiLC0013CEZZ	J	Ceramic Filter	AE
CF631	RFiLA0034CEZZ	J	Ceramic Filter	AD
CF2040	RFiLC0121GEZZ	J	Ceramic Filter	AD
L201	VP-XF1R2K0000	J	Peaking 1.2µH	AB
L202	RCiLi0588CEZZ	J	VCO Coil	AF
L251	VP-XF390K0000	J	Peaking 39µH (29SL81M)	AB
L301	VP-XF8R2K0000	J	Peaking 8.2µH	AB
L302	RCiLi0613CEZZ or RCiLi0605CEZZ	J	IF Coil	AE
L401	VP-XF6R8K0000	J	Peaking 6.8µH	AB
L402	VP-XF3R3K0000	J	Peaking 3.3µH	AB
L403	VP-XF8R2K0000	J	Peaking 8.2µH	AB
L404	VP-XF8R2K0000	J	Peaking 8.2µH	AB
L421	VP-XF680K0000	J	Peaking 68µH (26SL41M, 26SL71M)	AB
L672	RCiLZ0101MEZZ	M	Coil	AL
⚠ L701	RCiLF0025PEZZ	J	Filter	AK
⚠ L702	RCiLF0025PEZZ	J	Filter	AK
⚠ L705	RCiLP0179CEZZ	J	Coil	AD
L729	RCiLP0179CEZZ	J	Coil	AD
L2040	RCiLB0131CEZZ	J	Oscillation Coil	AE
SF201	RFiLC0405CEZZ	J	SAW Filter	AH

TRANSFORMERS

T601	RTRNZ0057PEZZ	R	Transformer	AK
▲⚠ T602	RTRNF0037MEZZ or RTRNF0033MEZZ	X	H-Volt Transformer (26SL41M, 26SL71M)	AZ
▲⚠ T602	RTRNF0038MEZZ	X	H-Volt Transformer (29SL81M)	AY
⚠ T701	RTRNP0543CEZZ	J	Transformer	AM
⚠ T702	RTRNZ0017MEZZ	J	Transformer (26SL41M)	AT
⚠ T702	RTRNZ0102GJZZ	X	Transformer (26SL71M, 29SL81M)	AS

CAPACITORS

[EL.··· Electrolytic, M-Poly.··· Metalized Polypro Film]

C51	VCEA0A1CW476M	J	47	16V	EL.	AB
C53	VCEA0A1HW105M	J	1.0	50V	EL.	AB
C54	VCEA0A1HW475M	J	4.7	50V	EL.	AB
C55	VCEA0A1CW108M	J	1000	16V	EL.	AD
C103	VCEA0A1CW228M	J	2200	16V	EL.	AD
C201	VCKYPA1HB102K	J	1000p	50V	Ceramic	AA
C202	VCKYCY1HF103Z	J	0.01	50V	Ceramic	AA
C203	VCKYCY1HB102K	J	1000p	50V	Ceramic	AA
C204	VCKYCY1HF103Z	J	0.01	50V	Ceramic	AA
C205	VCEA0A1HW474M	J	0.47	50V	EL.	AB
C206	VCEA0A1CW337M	J	330	16V	EL.	AC
C207	VCKYCY1HF103Z	J	0.01	50V	Ceramic	AA
C208	VCEA0A1HW474M	J	0.47	50V	EL.	AB
C209	VCKYCY1HB222K	J	2200p	50V	Ceramic	AA
C210	VCKYCY1HB102K	J	1000p	50V	Ceramic	AA
C251	VCQYTA1HM103J	J	0.01 (29SL81M)	50V	Mylar	AA
C252	VCQYTA1HM103J	J	0.01 (29SL81M)	50V	Mylar	AA
C253	VCCCCY1HH470J	J	47p (29SL81M)	50V	Ceramic	AA
C301	VCCCCY1HH330J	J	33p	50V	Ceramic	AA
C302	VCCCCY1HH151J	J	150p	50V	Ceramic	AA
C303	VCCCCY1HH390J	J	39p (26SL71M, 29SL81M)	50V	Ceramic	AA
C303	VCKYCY1HB472K	J	4700p (26SL41M)	50V	Ceramic	AA
C304	VCEA0A1HW225M	J	2.2 (26SL41M)	50V	EL.	AB
C307	VCCCCY1HH1R5C	J	1.5p	50V	Ceramic	AD
C308	VCKYCY1HB102K	J	1000p	50V	Ceramic	AA
C309	VCEA0A1CW337M	J	330	16V	EL.	AC
C313	VCEA0A1CW476M	J	47	16V	EL.	AB

PWB-A: DUNTA270WEV4 (26SL41M)
PWB-A: DUNTA270WEV3 (26SL71M)
PWB-A: DUNTA270WEV2 (29SL81M)
MAIN UNIT (Continued)

Ref. No.	Part No.	★	Description	Code
C351	VCEA0A1CW106M	J	10 16V EL. (26SL41M)	AB
C354	VCEA0A1CW106M	J	10 16V EL. (26SL41M)	AB
C356	VCEA0A1CW106M	J	10 16V EL. (26SL41M)	AB
C358	VCEA0A1CW477M	J	47 16V EL. (26SL41M)	AC
C359	VCEA0A1CW106M	J	10 16V EL. (26SL41M)	AB
C401	VCKYCY1HB331K	J	330p 50V Ceramic	AA
C402	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C403	VCKYCY1CB104K	J	0.1 16V Ceramic	AB
C404	VCEA0A1HW106M	J	10 50V EL.	AB
C405	VCEA0A1HW335M	J	3.3 50V EL. (26SL41M, 26SL71M)	AB
C405	VCEA0A1HW475M	J	4.7 50V EL. (29SL81M)	AB
C406	VCEA0A1HW225M	J	2.2 50V EL.	AB
C408	VCEA0A1HW106M	J	10 50V EL.	AB
C409	VCEA0A1HW105M	J	1.0 50V EL. (26SL41M, 26SL71M)	AB
C409	VCEA0A1HW335M	J	3.3 50V EL. (29SL81M)	AB
C410	VCQYTA1HM104J	J	0.1 50V Mylar	AA
C411	VCEA0A1CW337M	J	330 16V EL.	AC
C412	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C413	VCKYCY1HB103K	J	0.01 50V Ceramic	AA
C414	VCKYCY1CB104K	J	0.1 16V Ceramic (26SL41M, 26SL71M)	AB
C421	VCCCCY1HH330J	J	33p 50V Ceramic (26SL41M, 26SL71M)	AA
C422	VCEA0A1CW476M	J	47 16V EL.	AB
C451	VCQYTA1HM104J	J	0.1 50V Mylar	AA
C452	VCEA0A1HW475M	J	4.7 50V EL.	AB
C453	VCEA0A1CW226M	J	22 16V EL.	AB
C501	VCKYPA2HB102K	J	1000p 500V Ceramic	AA
⚠ C502	VCEA0A1VW108M	J	1000 35V EL.	AD
C510	VCFYSA1JB564J	J	0.56 63V Mylar	AE
C511	VCKYPA2HB391K	J	390p 500V Ceramic	AA
C512	VCQYTA1HM473J	J	0.047 50V Mylar	AA
C513	VCQYTA1HM103J	J	0.01 50V Mylar	AA
C514	VCEA0A1VW107M	J	100 35V EL.	AC
C515	VCEA0A1HW105M	J	1.0 50V EL. (26SL41M, 26SL71M)	AB
C515	VCEA0A1HW474M	J	0.47 50V EL. (29SL81M)	AB
C516	VCEACA1HC105K	J	1.0 50V EL. (26SL41M, 26SL71M)	AC
C516	VCSATA1VE684K	J	0.68 35V Tantalum (29SL81M)	AC
C517	VCEA0A1VW108M	J	1000 35V EL.	AD
C518	VCFYSA1JA473J	J	0.047 63V Mylar	AC
C551	VCSATA1CE225K	J	2.2 16V Tantalum	AB
C552	VCEA0A1HW225M	J	2.2 50V EL.	AB
C606	VCKYPA2HB561K	J	560p 500V Ceramic	AA
C607	VCKYPA1HB472K	J	4700p 50V Ceramic	AA
▲⚠ C610	VCFPVC3CA722H	J	7200p 1.6kV Polypro Film	AF
▲⚠ C611	VCFPVC3CA722H	J	7200p 1.6kV Polypro Film	AF
C615	VCKYPA2HB102K	J	1000p 500V Ceramic	AA
⚠ C623	VCEA4A2EN106M	J	10 250V EL.	AD
C631	VCEA0A1HW335M	J	3.3 50V EL.	AB
C632	VCQYTA1HM103J	J	0.01 50V Mylar	AA
C633	VCEA0A1CW477M	J	470 16V EL.	AC
C652	VCEA0A1HW106M	J	10 50V EL.	AB
C653	VCEA0A1HW106M	J	10 50V EL.	AB
C680	VCFPVC2DB564J	J	0.56 200V Polypro Film (26SL41M, 26SL71M)	AF
C680	VCFPVC2DB474J	J	0.47 200V Polypro Film (29SL81M)	AE
C682	VCKYPA2HB331K	J	330p 500V Ceramic	AA
⚠ C701	RC-FZ017SCEZZ	J	0.22 275V Plastic	AD
	or			
	RC-FZ012SGEZZ	J	0.047 AC250V Plastic	
C702	RC-KZ0029CEZZ	J	0.01 250V Ceramic	AC
C703	RC-KZ0029CEZZ	J	0.01 250V Ceramic	AC
⚠ C705	RC-EZ0800CEZZ	J	560 200V EL.	AQ
⚠ C706	RC-KZ0092GEZZ	J	3300p 250V Ceramic	AF
C707	VCFPVC3CA102H	X	1000p 1.6kV Polypro Film	AF
C708	VCCSPA1HL471J	J	470p 50V Ceramic	AA
C709	VCEA0A1VW107M	J	100 35V EL.	AC
C710	VCQYTA1HM152J		1500p 50V Mylar	AA
C717	VCKYPA2HB472K		4700p 500V Ceramic	AB
C718	VCKYPA2HB472K	J	4700p 500V Ceramic	AB
C722	VCQYTA1HM104J		0.1 50V Mylar	AA
⚠ C723	RC-EZ0724CEZZ	J	100 160V EL.	AG
⚠ C725	RC-EZ0809CEZZ	J	220 160V EL.	AL
C726	RC-KZ0338CEZZ	J	560p 2kV EL.	AD
C727	RC-KZ0338CEZZ	J	560p 2kV EL.	AD
C729	VCEA0A1CW106M	J	10 16V EL.	AB
⚠ C730	RC-EZ0003PEZZ	R	1000 35V EL.	AF
⚠ C731	RC-EZ0385CEZZ	J	1000 16V EL.	AE
C732	VCKYPA2HB102K	J	1000p 500V Ceramic	AA
C741	VCKYPA2HB102K	J	1000p 500V Ceramic	AA
C742	VCKYPA2HB102K	J	1000p 500V Ceramic	AA
C753	VCEA0A1CW107M	J	100 16V EL.	AC
C755	VCEA0A1CW476M	J	47 16V EL.	AB
C772	VCEA0A1VW477M	J	470 35V EL.	AB
C801	VCQYTA1HM223J	J	0.022 50V Mylar	AA
C802	VCEA0A1HW474M	J	0.47 50V EL.	AB
C803	VCCCCY1HH110J	J	11p 50V Ceramic	AA
C804	VCKYCY1CB104K	J	0.1 16V Ceramic	AB
C805	VCKYCY1CB104K	J	0.1 16V Ceramic	AB
C806	VCKYCY1CB104K	J	0.1 16V Ceramic	AB
C807	VCCCCY1HH221J	J	220p 50V Ceramic	AA
C808	VCKYCY1HB102K	J	1000p 50V Ceramic (26SL41M, 26SL71M)	AA
C901	VCEA0A1HW335M	J	3.3 50V EL. (26SL71M, 29SL81M)	AB
C902	VCEA0A1CW227M	J	220 16V EL. (26SL71M, 29SL81M)	AC
C903	VCEA0A1HW335M	J	3.3 50V EL. (26SL71M, 29SL81M)	AB
C908	VCEA0A1HW225M	J	2.2 50V EL. (26SL71M, 29SL81M)	AB
C909	VCEA0A1HW225M	J	2.2 50V EL.	AB
C910	VCKYCY1HB681K	J	680p 50V Ceramic (26SL71M, 29SL81M)	AA
C911	VCKYCY1HB681K	J	680p 50V Ceramic (26SL71M, 29SL81M)	AA
C912	VCEA0A1CW107M	J	100 16V EL. (26SL71M, 29SL81M)	AC
C922	VCEA0A1HW335M	J	3.3 50V EL. (26SL71M, 29SL81M)	AB
C923	VCEA0A1HW335M	J	3.3 50V EL. (26SL71M, 29SL81M)	AB
C931	VCKYCY1EB183K	J	0.018 25V Ceramic (26SL71M, 29SL81M)	AA
C932	VCKYCY1EB183K	J	0.018 25V Ceramic (26SL71M, 29SL81M)	AA
C951	VCEA0A1HW106M	J	10 50V EL. (26SL71M, 29SL81M)	AB
C952	VCEA0A1HW106M	J	10 50V EL. (26SL71M, 29SL81M)	AB
C954	VCKYCY1HF103Z	J	0.01 50V Ceramic (26SL71M, 29SL81M)	AA
C955	VCEA0A1CW106M	J	10 16V EL. (26SL71M, 29SL81M)	AB
C956	VCEA0A1CW106M	J	10 16V EL. (29SL81M)	AB
C2001	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C2002	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C2040	VCEA0A1AW107M	J	100 10V EL.	AB
C2041	VCEA0A1HW105M	J	1.0 50V EL.	AB
C2060	VCKYCY1CB104K	J	0.1 16V Ceramic	AB

PWB-A: DUNTA270WEV4 (26SL41M)
PWB-A: DUNTA270WEV3 (26SL71M)
PWB-A: DUNTA270WEV2 (29SL81M)
MAIN UNIT (Continued)

Ref. No.	Part No.	★	Description	Code
C2061	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C2062	VCEA0A1AW107M	J	100 10V EL.	AB
C2201	VCKYCY1HB102K	J	1000p 50V Ceramic (26SL41M, 26SL71M)	AA
C2201	VCKYCY1HB122K	J	1200p 50V Ceramic (29SL81M)	AA
C2202	VCCCCY1HH390J	J	39p 50V Ceramic	AA
C2602	VCCCCY1HH101J	J	100p 50V Ceramic	AA
C3001	VCE9GA1HW475M	J	4.7 50V EL. (N.P) (26SL71M, 29SL81M)	AB
C3002	VCKYCY1HB562K	J	5600p 50V Ceramic (26SL71M, 29SL81M)	AA
C3003	VCQYTA1HM123J	J	0.012 50V Mylar (26SL71M, 29SL81M)	AA
C3004	VCEA0A1HW105M	J	1.0 50V EL. (26SL71M, 29SL81M)	AB
C3005	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB
C3006	VCEA0A1HW106M	J	10 50V EL. (26SL71M, 29SL81M)	AB
C3007	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB
C3008	VCKYCY1HF103Z	J	0.01 50V Ceramic (26SL71M, 29SL81M)	AA
C3009	VCEA0A1CW227M	J	220 16V EL. (26SL71M, 29SL81M)	AC
C3010	VCE9GA1HW475M	J	4.7 50V EL. (N.P) (26SL71M, 29SL81M)	AB
C3011	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB
C3012	VCE9GA1HW475M	J	4.7 50V EL. (N.P) (26SL71M, 29SL81M)	AB
C3013	VCKYCY1HB272K	J	2700p 50V Ceramic (26SL71M, 29SL81M)	AA
C3014	VCQYTA1HM473J	J	0.047 50V Mylar (26SL71M, 29SL81M)	AA
C3015	VCSATA1CE335K	J	3.3 16V Tantalum (26SL71M, 29SL81M)	AC
C3016	VCE9GA1HW475M	J	4.7 50V EL. (N.P) (26SL71M, 29SL81M)	AB
C3017	VCSATA1CE106K	J	10 16V Tantalum (26SL71M, 29SL81M)	AD
C3018	VCEA0A1HW105M	J	1.0 50V EL. (26SL71M, 29SL81M)	AB
C3019	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB
C3020	VCEA0A1HW475M	J	4.7 50V EL.	AB
C3021	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB
C3022	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB

RESISTORS

[M-Ox.··· Metal Oxide, M-Film··· Metal Film]

RJ1	VRS-CY1JF000J	J	0	1/16W	M-Ox. (29SL81M)	AA
RJ2	VRS-CY1JF000J	J	0	1/16W	M-Ox. (29SL81M)	AA
RJ3	VRS-CY1JF000J	J	0	1/16W	M-Ox. (29SL81M)	AA
RJ11	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ15	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ16	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ18	VRS-CY1JF000J	J	0	1/16W	M-Ox. (26SL41M)	AA
RJ26	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ30	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ31	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ32	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ33	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ35	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ36	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ37	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ38	VRS-CY1JF000J	J	0	1/16W	M-Ox. (26SL41M)	AA
RJ42	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ46	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ52	VRS-CY1JF000J	J	0	1/16W	M-Ox. (26SL41M, 26SL71M)	AA
RJ55	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ56	VRS-CY1JF000J	J	0	1/16W	M-Ox. (29SL81M)	AA
RJ59	VRS-CY1JF000J	J	0	1/16W	M-Ox. (29SL81M)	AA
RJ61	VRS-CY1JF000J	J	0	1/16W	M-Ox. (26SL41M, 26SL71M)	AA
RJ66	VRS-CY1JF000J	J	0	1/16W	M-Ox. (26SL71M, 29SL81M)	AA
RJ67	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
⚠ R51	VRS-VV3AB151J	J	150	1W	M-Ox.	AA
⚠ R52	VRS-VV3DB123J	J	12k	2W	M-Ox.	AA
⚠ R53	VRS-VV3AB470J	J	47	1W	M-Ox.	AA
R54	VRD-RA2BE101J	J	100	1/8W	Carbon	AB
R55	VRD-RA2BE101J	J	100	1/8W	Carbon	AB
R56	VRD-RA2BE823J	J	82k	1/8W	Carbon	AA
R57	VRD-RA2BE392J	J	3.9k	1/8W	Carbon	AA
R201	VRD-RA2BE151J	J	150	1/8W	Carbon	AA
R202	VRD-RA2BE122J	J	1.2k	1/8W	Carbon	AA
R203	VRD-RA2BE682J	J	6.8k	1/8W	Carbon	AA
R204	VRD-RA2BE270J	J	27	1/8W	Carbon	AA
R205	VRS-CY1JF331J	J	330	1/16W	M-Ox.	AA
R206	VRD-RA2BE121J	J	120	1/8W	Carbon	AA
R207	VRD-RA2BE4R7J	J	4.7	1/8W	Carbon	AA
R208	VRD-RA2BE331J	J	330	1/8W	Carbon	AA
R209	VRS-CY1JF222J	J	2.2k	1/16W	M-Ox. (29SL81M)	AA
R251	VRS-CY1JF332J	J	3.3k	1/16W	M-Ox. (29SL81M)	AA
R252	VRD-RA2BE562J	J	5.6k	1/8W	Carbon (29SL81M)	AA
R253	VRD-RA2BE332J	J	3.3k	1/8W	Carbon (29SL81M)	AA
R254	VRD-RA2BE223J	J	22k	1/8W	Carbon (29SL81M)	AA
R255	VRS-CY1JF563J	J	56k	1/16W	M-Ox. (29SL81M)	AA
R256	VRS-CY1JF182J	J	1.8k	1/16W	M-Ox. (29SL81M)	AA
R257	VRS-CY1JF470J	J	47	1/16W	M-Ox. (29SL81M)	AA
R258	VRS-CY1JF472J	J	4.7k	1/16W	M-Ox. (29SL81M)	AA
R259	VRS-CY1JF472J	J	4.7k	1/16W	M-Ox. (29SL81M)	AA
R301	VRD-RA2BE222J	J	2.2k	1/8W	Carbon	AA
R302	VRS-CY1JF102J	J	1.0k	1/16W	M-Ox.	AA
R303	VRD-RA2BE153J	J	15k	1/8W	Carbon (26SL41M)	AA
R303	VRD-RA2BE103J	J	10k	1/8W	Carbon (26SL71M, 29SL81M)	AA
R304	VRD-RA2BE333J	J	33k	1/8W	Carbon (26SL71M, 29SL81M)	AA
R305	VRD-RA2BE102J	J	1.0k	1/8W	Carbon (26SL71M, 29SL81M)	AA
R306	VRD-RA2BE152J	J	1.5k	1/8W	Carbon (26SL71M, 29SL81M)	AA
R351	VRD-RA2BE683J	J	68k	1/8W	Carbon (26SL41M)	AA
R352	VRD-RA2BE103J	J	10k	1/8W	Carbon (26SL41M)	AA
R353	VRD-RA2BE822J	J	8.2k	1/8W	Carbon (26SL41M)	AA
R354	VRD-RA2BE223J	J	22k	1/8W	Carbon (26SL41M)	AA

PWB-A: DUNTA270WEV4 (26SL41M)
PWB-A: DUNTA270WEV3 (26SL71M)
PWB-A: DUNTA270WEV2 (29SL81M)
MAIN UNIT (Continued)

Ref. No.	Part No.	★	Description	Code
R355	VRD-RA2BE683J	J	68k 1/8W Carbon (26SL41M)	AA
R356	VRD-RA2BE103J	J	10k 1/8W Carbon (26SL41M)	AA
R357	VRD-RA2BE822J	J	8.2k 1/8W Carbon (26SL41M)	AA
R358	VRD-RA2BE223J	J	22k 1/8W Carbon (26SL41M)	AA
R401	VRS-CY1JF682J	J	6.8k 1/16W M-Ox.	AA
R402	VRS-CY1JF331J	J	330 1/16W M-Ox.	AA
R403	VRS-CY1JF391J	J	390 1/16W M-Ox.	AA
R404	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R405	VRS-CY1JF470J	J	47 1/16W M-Ox.	AA
R406	VRS-CY1JF680J	J	68 1/16W M-Ox.	AA
R407	VRS-CY1JF102J	J	1.0k 1/16W M-Ox.	AA
R408	VRS-CY1JF471J	J	470 1/16W M-Ox.	AA
R409	VRD-RA2BE562J	J	5.6k 1/8W Carbon	AA
R410	VRD-RA2BE124J	J	120k 1/8W Carbon (26SL41M, 26SL71M)	AA
R410	VRD-RA2BE154J	J	150k 1/8W Carbon (29SL81M)	AA
R411	VRD-RA2BE153J	J	15k 1/8W Carbon	AA
R412	VRD-RA2BE561J	J	560 1/8W Carbon	AA
R413	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
R414	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
R415	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
R416	VRS-CY1JF332J	J	3.3k 1/16W M-Ox. (29SL81M)	AA
R421	VRD-RA2BE152J	J	1.5k 1/8W Carbon (26SL41M, 26SL71M)	AA
R422	VRS-CY1JF472J	J	4.7k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R423	VRS-CY1JF152J	J	1.5k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R424	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
⚠ R451	VRS-SV2HC103J	J	10k 1/2W M-Ox.	AA
R452	VRD-RM2HD153J	J	15k 1/2W Carbon	AA
R453	VRD-RA2EE683J	J	68k 1/4W Carbon	AA
R454	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R456	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R456	VRD-RA2BE183J	J	18k 1/8W Carbon (29SL81M)	AA
R458	VRD-RA2BE152J	J	1.5k 1/8W Carbon	AA
R491	VRS-CY1JF330J	J	33 1/16W M-Ox.	AA
R492	VRS-CY1JF330J	J	33 1/16W M-Ox.	AA
R493	VRS-CY1JF330J	J	33 1/16W M-Ox.	AA
R494	VRD-RA2BE101J	J	100 1/8W Carbon	AB
⚠ R501	VRN-VV3ABR56J	J	0.56 1W M-Film (26SL41M, 26SL71M)	AA
⚠ R501	VRN-VV3ABR27J	J	0.27 1W M-Film (29SL81M)	AA
R510	VRD-RA2BE471J	J	470 1/8W Carbon	AA
R511	VRD-RA2BE104G	J	100k 1/8W Carbon (26SL41M, 26SL71M)	AA
R511	VRD-RA2BE823G	J	82k 1/8W Carbon (29SL81M)	AB
R512	VRD-RA2BE124G	J	120k 1/8W Carbon	AA
R513	VRD-RA2BE473J	J	47k 1/8W Carbon	AA
R514	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R519	VRD-RA2BE123G	J	12k 1/8W Carbon (26SL41M, 26SL71M)	AA
R519	VRD-RA2BE153G	J	15k 1/8W Carbon (29SL81M)	AA
R520	VRD-RA2BE184J	J	180k 1/8W Carbon	AA
R523	VRN-VV3AB1R0J	J	1.0 1W M-Film	AA
⚠ R524	VRS-VV3AB391J	J	390 1W M-Ox.	AA
R526	VRD-RA2BE332J	J	3.3k 1/8W Carbon (26SL41M, 26SL71M)	AA
R526	VRD-RA2BE472J	J	4.7k 1/8W Carbon (29SL81M)	AA
R551	VRS-CY1JF472J	J	4.7k 1/16W M-Ox.	AA
R552	VRS-CY1JF102J	J	1.0k 1/16W M-Ox.	AA
R553	VRD-RA2BE223J	J	22k 1/8W Carbon (26SL41M, 26SL71M)	AA
R553	VRD-RA2BE183J	J	18k 1/8W Carbon (29SL81M)	AA
R554	VRD-RA2BE184J	J	180k 1/8W Carbon (26SL41M, 26SL71M)	AA
R554	VRD-RA2BE104J	J	100k 1/8W Carbon (29SL81M)	AA
⚠ R604	VRS-VV3LB392J	J	3.9k 3.0W M-Ox.	AB
R605	VRD-RA2BE331J	J	330 1/8W Carbon	AA
R606	VRD-RA2BE331J	J	330 1/8W Carbon	AA
⚠ R607	VRS-VV3LB392J	J	3.9k 3.0W M-Ox.	AB
⚠ R609	VRS-VV3AB562J	J	5.6k 1W M-Ox.	AA
R610	VRD-RM2HD220J	J	22 1/2W Carbon	AA
⚠ R611	VRS-KA3NG3R3K	J	3.3 7.0W M-Ox.	AD
R621	VRN-VV3AB3R3J	J	3.3 1W M-Film (26SL41M, 26SL71M)	AA
⚠ R621	VRN-VV3DB1R2J	J	1.2 2W M-Film (29SL81M)	AA
⚠ R622	VRN-VV3ABR33J	J	0.33 1W M-Film (26SL41M, 26SL71M)	AA
⚠ R622	VRN-VV3ABR47J	J	0.47 1W M-Film (29SL81M)	AA
⚠ R623	VRN-VV3AB2R7J	J	2.7 1W M-Film	AA
⚠ R624	VRS-VV3DB332J	J	3.3k 2W M-Ox.	AA
R625	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R627	VRD-RM2HD224J	J	220k 1/2W Carbon	AA
R631	VRS-CY1JF391J	J	390 1/16W M-Ox.	AA
R632	VRS-CY1JF152J	J	1.5k 1/16W M-Ox.	AA
R633	VRD-RA2BE472J	J	4.7k 1/8W Carbon	AA
R634	VP-XF120K0000	J	Peaking 12µH	AB
▲⚠ R651	VRS-SV2HC270J	J	27 1/2W M-Ox.	AA
▲⚠ R652	VRN-RA2BK103F	J	10k 1/8W M-Film	AA
▲⚠ R653	VRN-RA2BK822F	J	8.2k 1/8W M-Film	AA
▲⚠ R654	VRD-RA2BE184J	J	180k 1/8W Carbon (26SL41M, 26SL71M)	AA
▲⚠ R654	VRD-RA2BE124J	J	120k 1/8W Carbon (29SL81M)	AA
▲⚠ R655	VRS-CY1JF104J	J	100k 1/16W M-Ox.	AA
R690	VRS-SV2HC102J	J	1.0k 1/2W M-Ox.	AA
⚠ R701	RR-DZ0049CEZZ or RR-HZ0048CEZZ	J	3.9M 1/2W Carbon	AB
⚠ R702	VRW-KQ3NCR82K	X	0.82 7W M-Ox.	AF
R704	VRD-RM2HD154J	J	150k 1/2W Carbon	AA
⚠ R705	VRN-VV3DBR22J	J	0.22 2W M-Film	AB
⚠ R706	VRN-VV3DBR27J	J	0.27 2W M-Film	AB
R707	VRS-SV2HC681J	J	680 1/2W M-Ox.	AA
⚠ R709	VRN-GA2EB1R0J	J	1.0 1/4W M-Film	AA
R710	VRD-RM2HD100J	J	10 1/2W Carbon	AA
R711	VRD-RA2EE132J	J	1.3k 1/4W Carbon	AA
R713	VRD-RA2EE102J	J	1.0k 1/4W Carbon	AA
⚠ R715	VRS-VV3DB153J	J	15k 2W M-Ox.	AA
⚠ R723	VRN-VV3DBR39J	J	0.39 2W M-Film	AA
R724	VRS-SV2HC332J	J	3.3k 1/2W M-Ox.	AA
R725	VRS-SV2HC821J	J	820 1/2W M-Ox.	AA
R727	VRD-RA2BE271J	J	270 1/8W Carbon	AA
R734	VRD-RM2HD124J	J	120k 1/2W Carbon	AA
⚠ R737	VRN-VV3DBR56J	J	0.56 2W M-Film	AA
R751	VRD-RA2BE473J	J	47k 1/8W Carbon	AA
R801	VRD-RA2BE332J	J	3.3k 1/8W Carbon	AA
R802	VRS-CY1JF332J	J	3.3k 1/16W M-Ox.	AA
R803	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
R804	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
R805	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
R806	VRS-CY1JF333J	J	33k 1/16W M-Ox.	AA
R807	VRS-CY1JF152J	J	1.5k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R808	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL41M, 26SL71M)	AA

PWB-A: DUNTA270WEV4 (26SL41M)
PWB-A: DUNTA270WEV3 (26SL71M)
PWB-A: DUNTA270WEV2 (29SL81M)
MAIN UNIT (Continued)

Ref. No.	Part No.	★	Description	Code
R901	VRD-RA2BE331J	J	330 1/8W Carbon (26SL71M, 29SL81M)	AA
R903	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R904	VRS-CY1JF683J	J	68k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R905	VRS-CY1JF223J	J	22k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R906	VRS-CY1JF392J	J	3.9k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R907	VRS-CY1JF182J	J	1.8k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R908	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R910	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R911	VRS-CY1JF683J	J	68k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R912	VRS-CY1JF223J	J	22k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R913	VRS-CY1JF392J	J	3.9k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R914	VRS-CY1JF182J	J	1.8k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R915	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R916	VRS-CY1JF683J	J	68k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R917	VRS-CY1JF332J	J	3.3k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R918	VRS-CY1JF332J	J	3.3k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R922	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R923	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R924	VRD-RA2BE750J	J	75 1/8W Carbon (26SL71M)	AA
R925	VRD-RA2BE104J	J	100k 1/8W Carbon (26SL71M, 29SL81M)	AA
R926	VRD-RA2BE104J	J	100k 1/8W Carbon (26SL71M, 29SL81M)	AA
R951	VRD-RA2BE101J	J	100 1/8W Carbon (26SL71M)	AB
R952	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R953	VRS-CY1JF101J	J	100 1/16W M-Ox. (29SL81M)	AA
R954	VRD-RA2BE750J	J	75 1/8W Carbon (29SL81M)	AA
R961	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R962	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R2001	VRD-RA2BE562J	J	5.6k 1/8W Carbon	AA
R2002	VRD-RA2BE103J	J	10k 1/8W Carbon	AA
R2004	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R2006	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL41M)	AA
R2008	VRD-RA2BE224J	J	220k 1/8W Carbon	AA
R2009	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R2010	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R2011	RH-EX0611GEZZ	J	Zener Diode	AA
R2012	VRS-CY1JF471J	J	470 1/16W M-Ox.	AA
R2013	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R2016	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
R2020	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
R2023	VRS-CY1JF223J	J	22k 1/16W M-Ox.	AA
R2024	VRD-RA2BE562J	J	5.6k 1/8W Carbon (29SL81M)	AA
R2024	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R2025	VRD-RA2BE562J	J	5.6k 1/8W Carbon (29SL81M)	AA
R2025	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R2026	VRD-RA2BE562J	J	5.6k 1/8W Carbon (29SL81M)	AA
R2026	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R2027	VRD-RA2BE682J	J	6.8k 1/8W Carbon	AA
R2028	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R2029	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R2032	VRD-RA2BE103J	J	10k 1/8W Carbon	AA
R2034	VRD-RA2BE102J	J	1.0k 1/8W Carbon (29SL81M)	AA
R2035	VRD-RA2BE223J	J	22k 1/8W Carbon	AA
R2038	VRD-RA2BE103J	J	10k 1/8W Carbon (29SL81M)	AA
R2040	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R2041	VRD-RA2BE333J	J	33k 1/8W Carbon	AA
R2042	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R2043	VRS-CY1JF333J	J	33k 1/16W M-Ox.	AA
R2044	VRD-RA2BE682J	J	6.8k 1/8W Carbon	AA
R2045	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R2046	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R2047	VRS-CY1JF221J	J	220 1/16W M-Ox.	AA
R2048	VRS-CY1JF562J	J	5.6k 1/16W M-Ox.	AA
R2049	VRD-RA2EE182J	J	1.8k 1/4W Carbon	AA
R2060	VRD-RA2BE221J	J	220 1/8W Carbon	AA
R2061	VRD-RA2BE562J	J	5.6k 1/8W Carbon	AA
R2062	VRD-RA2BE183J	J	18k 1/8W Carbon	AA
R2063	VRD-RA2BE222J	J	2.2k 1/8W Carbon	AA
R2064	VRD-RA2BE332J	J	3.3k 1/8W Carbon	AA
R2067	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R2068	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA
R2069	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (29SL81M)	AA
R2070	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA
R2071	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R2101	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
R2102	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
R2201	VRD-RA2BE222J	J	2.2k 1/8W Carbon	AA
R2202	VRS-CY1JF103J	J	10k 1/16W M-Ox.	AA
R2203	VRS-CY1JF184J	J	180k 1/16W M-Ox.	AA
R2211	VRD-RA2BE222J	J	2.2k 1/8W Carbon	AA
R2212	VRS-CY1JF682J	J	6.8k 1/16W M-Ox.	AA
R2213	VRS-CY1JF333J	J	33k 1/16W M-Ox.	AA
R2401	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
R2402	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA
R2403	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R2404	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R2507	VRD-RA2BE823J	J	82k 1/8W Carbon	AA
R3001	VRD-RA2BE101J	J	100 1/8W Carbon (26SL71M, 29SL81M)	AB
R3002	VRD-RA2BE101J	J	100 1/8W Carbon (26SL71M, 29SL81M)	AB
R3003	VRS-CY1JF105J	J	1.0M 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R3004	VRS-CY1JF104J	J	100k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R3005	VRS-CY1JF623J	J	62k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R3007	VRS-CY1JF332J	J	3.3k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R3008	VRS-CY1JF302J	J	3.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R3010	VRS-CY1JF392J	J	3.9k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R3011	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R3012	VRS-CY1JF102J	J	1.0k 1/16W M-Ox.	AA

Ref. No.	Part No.	★	Description	Code

PWB-A: DUNTA270WEV4 (26SL41M)
PWB-A: DUNTA270WEV3 (26SL71M)
PWB-A: DUNTA270WEV2 (29SL81M)
MAIN UNIT (Continued)

R3013	VRD-RA2BE104J	J	100k 1/8W Carbon (26SL71M, 29SL81M)	AA
R3014	VRD-RA2BE104J	J	100k 1/8W Carbon	AA
R3015	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R3016	VRD-RA2BE750J	J	75 1/8W Carbon	AA
R3017	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R3018	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA

MISCELLANEOUS PARTS

⚠ RY701	RRLYJ0081CEZZ	J	Relay	AL
⚠ F701	QFS-B4023CEZZ	J	Fuse 5A, 250V (26SL41M)	AC
⚠ F701	QFS-C5022CEZZ	J	Fuse 5A, 250V (26SL71M, 29SL81M)	AD
FH701	QFSHD1013CEZZ	J	Fuse Holder	AC
FH702	QFSHD1014CEZZ	J	Fuse Holder	AC
FB601	RBLN-0047CEZZ	J	Ferrite Bead	AB
FB702	RBLN-0036CEZZ	J	Ferrite Bead	AB
FB704	RBLN-0037CEZZ	J	Ferrite Bead	AB
FB706	RBLN-0037CEZZ	J	Ferrite Bead	AB
P351	QPLGN0441CEZZ	J	Plug, 4-pin (S) (26SL41M)	AB
P352	QPLGN0641CEZZ	J	Plug, 6-pin (PA) (26SL71M, 29SL81M)	AB
P401	QSOCN0585CEZZ	J	Socket, 5-pin (KB) (29SL81M)	AC
P402	QSOCN0585CEZZ	J	Socket, 5-pin (KA) (29SL81M)	AC
P601	QPLGN0160FJZZ	J	Plug, 5-pin (K)	AD
P621	QPLGN0441CEZZ	J	Plug, 4-pin (YBN)	AB
P651	QPLGN0341CEZZ	J	Plug, 3-pin	AA
P701	QPLGN0260CEZZ	J	Plug, 2-pin (M)	AC
P703	QPLGN0269GEZZ	J	Plug, 2-pin (H)	AB
P901	QPLGN0841CEZZ	J	Plug, 8-pin (FA) (26SL41M)	AB
P901	QPLGN0541CEZZ	J	Plug, 5-pin (FA) (26SL71M, 29SL81M)	AB
P903	QPLGN0541CEZZ	J	Plug, 5-pin (GBN)	AB
P2003	QPLGN0841CEZZ	J	Plug, 8-pin (FB)	AB
P2401	QPLGN0541CEZZ	J	Plug, 5-pin	AB
RDA501	PRDAR0234PEFW	R	Heat Sink, for IC501	AH
RDA604	PRDAR0233PEFW	R	Heat Sink, for Q602	AK
RDA701	PRDAR1006MEFW	J	Heat Sink, for IC701 (26SL71M, 29SL81M)	AH
RDA701	PRDAR1008MEFW	J	Heat Sink, for IC701 (26SL41M)	AH
RDA751	PRDAR5072CEFW	J	Heat Sink, for IC751	AC
TAN921	QTANJ0253CEZZ	X	AV Terminal (26SL41M)	AK
TAN921	QTANJ0523CEZZ	X	AV Terminal (26SL71M, 29SL81M)	AL
	LX-BZ3049GEFD	X	Screw	AA
	LX-TZ3004CEFD	J	Screw	AA

Ref. No.	Part No.	★	Description	Code

PWB-B: DUNTK9510WEV0
CRT UNIT

TRANSISTORS

Q851	VS2SC3198-Y-1	J	2SC3198 (Y)	AA
Q852	VS2SC3789//2E or VS2SC3619LB-1	J	2SC3789	AF
Q853	VS2SC3198-Y-1 or VS2SC3619LB-1	J	2SC3198 (Y)	AA
Q854	VS2SC3789//2E	J	2SC3789	AF
Q855	VS2SC3198-Y-1	J	2SC3198 (Y)	AA
Q856	VS2SC3789//2E or VS2SC3619LB-1	J	2SC3789	AF
Q881	VS2SA1266-Y-1	J	2SA1266 (Y)	AA

DIODES

You can substitute "RH-DX0475CEZZ" for "VHD1SS119//-1".

D881	VHD1SS119//-1	J	Diode	AB
D882	VHD1SS119//-1	J	Diode	AB
D884	VHD1SS119//-1	J	Diode	AB

COIL

L851	VP-MK820K0000	J	Peaking 82µH	AB

CAPACITORS

[EL.··· Electrolytic]

C851	VCCSPA1HL391J	J	390p	50V	Ceramic	AA
C852	VCCSPA1HL331J	J	330p	50V	Ceramic	AA
C853	VCCSPA1HL391J	J	390p	50V	Ceramic	AA
C854	RC-KZ0024CEZZ or VCKYPB3DE472Z	J	0.001 0.0047	2kV	Ceramic	AC
C883	VCEA0A1HW106M	J	10	50V	EL.	AB

RESISTORS

[M-Ox.··· *Metal Oxide*]

R851	VRD-RA2BE470J	J	47	1/8W	Carbon	AA
R852	VRD-RA2BE181J	J	180	1/8W	Carbon	AA
R853	VRD-RA2BE121J	J	120	1/8W	Carbon	AA
R855	VRD-RA2BE471J	J	470	1/8W	Carbon	AA
R856	VRD-RA2BE221J	J	220	1/8W	Carbon	AA
⚠ R857	VRS-VV3LB123J	J	12k	3.0W	M-Ox.	AA
R858	VRD-RM2HD222J	J	2.2k	1/2W	Carbon	AA
R859	VRD-RA2BE470J	J	47	1/8W	Carbon	AA
R860	VRD-RA2BE181J	J	180	1/8W	Carbon	AA
R861	VRD-RA2BE121J	J	120	1/8W	Carbon	AA
R863	VRD-RA2BE471J	J	470	1/8W	Carbon	AA
R864	VRD-RA2BE221J	J	220	1/8W	Carbon	AA
⚠ R865	VRS-VV3LB123J	J	12k	3.0W	M-Ox.	AB
R866	VRD-RM2HD222J	J	2.2k	1/2W	Carbon	AA
R867	VRD-RA2BE470J	J	47	1/8W	Carbon	AA
R868	VRD-RA2BE181J	J	180	1/8W	Carbon	AA
R869	VRD-RA2BE121J	J	120	1/8W	Carbon	AA
R871	VRD-RA2BE471J	J	470	1/8W	Carbon	AA
R872	VRD-RA2BE221J	J	220	1/8W	Carbon	AA
⚠ R873	VRS-VV3LB123J	J	12k	3.0W	M-Ox.	AB
R874	VRD-RM2HD222J	J	2.2k	1/2W	Carbon	AA
R881	VRD-RA2BE102J	J	1.0k	1/8W	Carbon	AA
R882	VRD-RA2BE331J	J	330	1/8W	Carbon	AA
R883	VRD-RA2BE561J	J	560	1/8W	Carbon	AA
R884	VRD-RA2BE152J	J	1.5k	1/8W	Carbon	AA
R895	VRD-RA2BE470J	J	47	1/8W	Carbon	AA

MISCELLANEOUS PARTS

P851	QPLGN0541CEZZ	J	Plug, 5-pin (GBN)	AB
P852	QPLGN0441CEZZ	J	Plug, 4-pin (YBN)	AB
SC851	QSOCV0937CEZZ	J	CRT Socket	AL

Ref. No.	Part No.	★	Description	Code

PWB-F: DUNTK9831WEV0 (26SL41M)
PWB-F: DUNTK9831WEV1 (26SL71M, 29SL81M)
FRONT AV UNIT

DIODE

D4001	RH-PX0383CEZZ	X	LED, Power Ind.	AG

CAPACITOR

[EL.··· *Electrolytic*]

C4601	VCEA0A1HW475M	J	4.7	50V	EL.	AB

RESISTORS

R4501	VRD-RA2BE103J	J	10k	1/8W	Carbon	AA
R4503	VRD-RA2BE273J	J	27k	1/8W	Carbon	AA
R4504	VRD-RA2BE123J	J	12k	1/8W	Carbon	AA
R4505	VRD-RA2BE563J	J	56k	1/8W	Carbon	AA
R4506	VRD-RA2BE563J	J	56k	1/8W	Carbon	AA
R4508	VRD-RA2BE153J	J	15k	1/8W	Carbon	AA
R4509	VRD-RA2BE272J	J	2.7k	1/8W	Carbon	AA
R4601	VRD-RA2EE331J	J	330	1/4W	Carbon	AA

SWITCHES

S4501	QSW-K0095CEZZ	J	Power	AB
S4502	QSW-K0095CEZZ	J	VOL-Down	AB
S4503	QSW-K0095CEZZ	J	VOL-Up	AB
S4504	QSW-K0095CEZZ	J	CH-Down	AB
S4505	QSW-K0095CEZZ	J	CH-Up	AB
S4506	QSW-K0095CEZZ	J	MENU	AB

MISCELLANEOUS PARTS

J4001	QJAKE0185CEZZ	J	Audio IN (L) (26SL71M, 29SL81M)	AE
J4002	QJAKE0192CEZZ	X	Audio IN (R) (26SL71M, 29SL81M)	AD
J4002	QJAKE0183CEZZ	X	Audio IN (26SL41M)	AE
J4003	QJAKE0150CEZZ	J	Video IN (26SL71M, 29SL81M)	AD
J4003	QJAKE0108CEZZ	J	Video IN (26SL41M)	AC
P4001	QPLGN0541CEZZ	J	Plug, 5-pin (FA) (26SL71M, 29SL81M)	AB
P4001	QPLGN0841CEZZ	J	Plug, 8-pin (FA) (26SL41M)	AB
P4002	QPLGN0841CEZZ	J	Plug, 8-pin (FB)	AB
RMC4601	RRMCU0235CEZZ	J	R/C Receiver	AK

Ref. No.	Part No.	★	Description	Code

PWB-K: DUNTK9832WEV0 (29SL81M)
Y/C UNIT

INTEGRATED CIRCUITS

IC1401	VHiTC90A45F-1	J	TC90A45F	AM
IC1402	VHiMM1111XF1E	J	MM1111XFBE	AE
IC1403	VHiKA78L05B-1	J	KA78L05BP	AE

TRANSISTORS

You can substitute "VS2SD601AR/-1" for "VS2SC2412KQ-1".

Q1401	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1402	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1403	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1404	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1405	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1406	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1407	VS2SC2412KQ-1	J	2SC2412KQ	AA

DIODES

You can substitute "RH-DX0475CEZZ" for "VHD1SS119//-1".

D1401	VHD1SS119//-1	J	Diode	AB
D1402	VHD1SS119//-1	J	Diode	AB
D1403	VHD1SS119//-1	J	Diode	AB

COILS

L1401	VP-XF100K0000	J	Peaking 10µH	AB
L1402	VP-XF100K0000	J	Peaking 10µH	AB
L1403	VP-XF150K0000	J	Peaking 15µH	AB
L1405	VP-XF330K0000	J	Peaking 33µH	AB
L1406	VP-XF100K0000	J	Peaking 10µH	AB

CAPACITORS

[EL.··· *Electrolytic*]

C1401	VCCCCY1HH220J	J	22p	50V	Ceramic	AA
C1402	VCFYSA1HA474J	J	0.47	50V	Mylar	
C1403	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1404	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1405	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1406	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1407	VCKYCY1CB104K	J	0.1	16V	Ceramic	AB
C1408	VCEA0A1HW106M	J	10	50V	EL.	AB
C1409	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1410	VCCCCY1HH181J	J	180p	50V	Ceramic	AA
C1411	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1412	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1413	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1415	VCEA0A1CW476M	J	47	16V	EL	AB
C1416	VCKYCY1CB104K	J	0.1	16V	Ceramic	AB
C1417	VCCCCY1HH390J	J	39p	50V	Ceramic	AA
C1418	VCEA0A1HW106M	J	10	50V	EL.	AB
C1419	VCEA0A1HW106M	J	10	50V	EL.	AB
C1420	VCKYCY1HB103K	J	0.01	50V	Ceramic	AA
C1421	VCCCCY1HH120J	J	12p	50V	Ceramic	AA
C1423	VCCCCY1HH120J	J	12p	50V	Ceramic	AA
C1424	VCKYCY1CB104K	J	0.1	16V	Ceramic	AB
C1425	VCKYCY1CB104K	J	0.1	16V	Ceramic	AB
C1426	VCKYCY1HB102K	J	100p	50V	Ceramic	AA
C1427	VCEA0A1HW106M	J	10	50V	EL.	AB
C1428	VCCCCY1HH270J	J	27p	50V	Ceramic	AA

RESISTORS

[M-Ox.··· *Metal Oxide*]

RJ1	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ2	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ3	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
RJ5	VRS-CY1JF000J	J	0	1/16W	M-Ox.	AA
R1401	VRS-CY1JF103J	J	10k	1/16W	M-Ox.	AA
R1402	VRS-CY1JF103J	J	10k	1/16W	M-Ox.	AA
R1403	VRS-CY1JF182J	J	1.8k	1/16W	M-Ox.	AA
R1404	VRS-CY1JF102J	J	1.0k	1/16W	M-Ox.	AA
R1405	VRS-CY1JF392J	J	3.9k	1/16W	M-Ox.	AA
R1406	VRS-CY1JF102J	J	1.0k	1/16W	M-Ox.	AA

Ref. No.	Part No.	★	Description	Code

PWB-K: DUNTK9832WEV0 (29SL81M)

Y/C UNIT (Continued)

R1407	VRS-CY1JF103J	J	10k	1/16W	M-Ox.	AA
R1408	VRS-CY1JF821J	J	820	1/16W	M-Ox.	AA
R1409	VRS-CY1JF101J	J	10	1/16W	M-Ox.	AA
R1410	VRS-CY1JF681J	J	680	1/16W	M-Ox.	AA
R1411	VRS-CY1JF101J	J	10	1/16W	M-Ox.	AA
R1412	VRS-CY1JF821J	J	820	1/16W	M-Ox.	AA
R1413	VRS-CY1JF471J	J	470	1/16W	M-Ox.	AA
R1414	VRS-CY1JF102J	J	1.0k	1/16W	M-Ox.	AA
R1415	VRS-CY1JF821J	J	820	1/16W	M-Ox.	AA
R1416	VRS-CY1JF122J	J	1.2k	1/16W	M-Ox.	AA
R1417	VRS-CY1JF273J	J	27k	1/16W	M-Ox.	AA
R1418	VRS-CY1JF153J	J	15k	1/16W	M-Ox.	AA
R1419	VRS-CY1JF101J	J	10	1/16W	M-Ox.	AA
R1420	VRS-CY1JF222J	J	2.2k	1/16W	M-Ox.	AA
R1421	VRS-CY1JF562J	J	5.6k	1/16W	M-Ox.	AA
R1422	VRS-CY1JF101J	J	10	1/16W	M-Ox.	AA
R1425	VRS-CY1JF471J	J	470	1/16W	M-Ox.	AA

MISCELLANEOUS PARTS

P1401	QPLGN0585CEZZ	J	Plug, 5-pin (KA)	AA
P1402	QPLGN0585CEZZ	J	Plug, 5-pin (KB)	AB

Ref. No.	Part No.	★	Description	Code

PWB-P: DUNTK9830WEV4 (26SL71M, 29SL81M)

AUDIO OUT UNIT

INTEGRATED CIRCUITS

IC5301	VHiAN5276//-1	J	AN5276	AR

CAPACITORS

[EL.··· Electrolytic]

C5301	VCEA0A1VW108M	J	1000	35V	EL.	AD
C5304	VCEA0A1HW225M	J	2.2	50V	EL.	AB
C5306	VCQYTA1HM152J	X	1500p	50V	Mylar	AA
C5307	VCQYTA1HM152J	X	1500p	50V	Mylar	AA
C5308	VCEA0A1VW107M	J	100	35V	EL.	AC
C5309	VCEA0A1EW108M	J	1000	25V	EL.	AD
C5310	VCEA0A1EW108M	J	1000	25V	EL.	AD

RESISTORS

[M-Film··· Metal Film]

⚠	R5301	VRN-VV3LB1R5J	J	1.5	3.0W	M-Film	AC
	R5302	VRD-RA2BE123J	J	12k	1/8W	Carbon	AA
	R5303	VRD-RA2BE223J	J	22k	1/8W	Carbon	AA
	R5304	VRD-RA2BE103J	J	10k	1/8W	Carbon	AA
	R5305	VRD-RA2BE103J	J	10k	1/8W	Carbon	AA
	R5306	VRD-RA2BE223J	J	22k	1/8W	Carbon	AA
	R5307	VRD-RA2BE102J	J	1.0k	1/8W	Carbon	AA

MISCELLANEOUS PARTS

P5301	QPLGN0441CEZZ	J	Plug, 4-pin (S)	AB
P5302	QPLGN0641CEZZ	J	Plug, 6-pin (PA)	AD
RDA5301	PRDRA0258PEFW		Heat Sink, for IC5301	AG

MISCELLANEOUS PARTS

Ref. No.	Part No.	★	Description	Code
⚠ ACC701	QACCZ3008PEZZ	R	AC Cord	AN
SP1	VSP0080PBL4YS	X	Speaker 32 ohm (L) (26SL41M)	AH
SP2	VSP0080PBL4YS	X	Speaker 32 ohm (R) (26SL41M)	AH
SP1	VSP1206PB378E	X	Speaker 8 ohm (L) (26SL71M, 29SL81M)	AQ
SP2	VSP1206PB378E	X	Speaker 8 ohm (R) (26SL71M, 29SL81M)	AQ
	QCNW-0102GJZZ	X	Connecting Cord (YBN)	AE
	QCNW-0103GJZZ	X	Connecting Cord (S) (26SL71M, 29SL81M)	AF
	QCNW-0106GJZZ	X	Connecting Cord (PA) (26SL71M, 29SL81M)	AG
	QCNW-0109GJZZ	X	Connecting Cord (GBN) (26SL41M, 26SL71M)	AE
	QCNW-0104GJZZ	X	Connecting Cord (FA) (26SL71M, 29SL81M)	AG
	QCNW-0105GJZZ	X	Connecting Cord (FB)	AG
	QCNW-0113GJZZ	X	Connecting Cord (FA) (26SL41M)	AG
	QCNW-0132GJZZ	X	Connecting Cord (S) (26SL41M)	AF
	TLABZ0115GJZZ	X	Label (26SL71M)	AG
	TLABZ0116GJZZ	X	Label (29SL81M)	AG
	TLABZ0121GJZZ	X	Label (26SL41M)	AG
	TLABM0003GJZZ	X	Model Label (26SL41M)	AF
	TLABM0107GJZZ	X	Model Label (26SL71M, 29SL81M)	AK

SUPPLIED ACCESORRIES

Ref. No.	Part No.	★	Description	Code
	RRMCG1339CESB	X	Infrared R/C Unit (26SL41M)	AQ
	RRMCG1573CESAM		Infrared R/C Unit (26SL71M, 29SL81M)	AW
	TiNS-7034GJZZ	X	Operation Manual (26SL41M)	AL
	TiNS-7090GJZZ	X	Operation Manual (26SL71M, 29SL81M)	AM

PACKING PARTS
(NOT REPLACEMENT ITEM)

Ref. No.	Part No.	★	Description	Code
	SPAKC0132GJZZ	–	Packing Case (26SL41M)	—
	SPAKC0131GJZZ	–	Packing Case (26SL71M)	—
	SPAKC0133GJZZ	–	Packing Case (29SL81M)	—
	SPAKP0105GJZZ	–	Wrapping Paper (26SL41M, 26SL71M)	—
	SPAKP0106GJZZ	–	Wrapping Paper (29SL81M)	—
	SPAKX0106GJZZ	–	Buffer Material (26SL41M, 26SL71M)	—
	SPAKX0005GJZZ	–	Buffer Material (29SL81M)	—
	SSAKA0101GJZZ	–	Polyethylene Bag	—

CABINET PARTS

Ref. No.	Part No.	★	Description	Code
26SL41M, 26SL71M				
1	CCABA0010WEH3	X	Front Cabinet Ass'y (26SL41M)	BE
1	CCABA0008WEH3	X	Front Cabinet Ass'y (26SL71M)	BF
1-1	*Not Available*	–	Front Cabinet	—
1-2	GCOVA0106GJSA	X	Cover for R/C	AG
1-3	HBDGB3141CESA	X	Badge, "SHARP"	AG
1-4	JBTN-0106GJSB	X	Button, Power	AG
1-5	MSPRC0005PEFW	R	Spring for Power Button	AB
1-6	GDORF0102GJSB	X	Door	AG
1-7	PKAi-0002PE00	X	Door Latch	AF
1-8	HiNDP0102GJZZ	X	Indication Plate (26SL41M)	AK
1-8	HiNDP0001GJZZ	X	Indication Plate (26SL71M)	AK
2	GCABB0009GJKA	J	Rear Cabinet (26SL41M)	BA
2	GCABB0008GJKA	X	Rear Cabinet (26SL71M)	BA
29SL81M				
1	CCABA0007WEH3	X	Front Cabinet Ass'y	BF
1-1	*Not Available*	–	Front Cabinet	—
1-2	GCOVA0005GJSA	X	Cover for R/C	AG
1-3	HBDGB3141CESB	X	Badge, "SHARP"	AG
1-4	JBTN-0005GJSB	X	Button, Power	AG
1-5	MSPRC0005PEFW	R	Spring for Power Button	AB
1-6	GDORF0001GJSB	X	Door	AG
1-7	PKAi-0002PE00	X	Door Latch	AF
1-8	HiNDP0001GJZZ	X	Indication Plate	AK
2	CCABB0006WEH0	X	Rear Cabinet Ass'y	BA

CABINET PARTS LOCATION

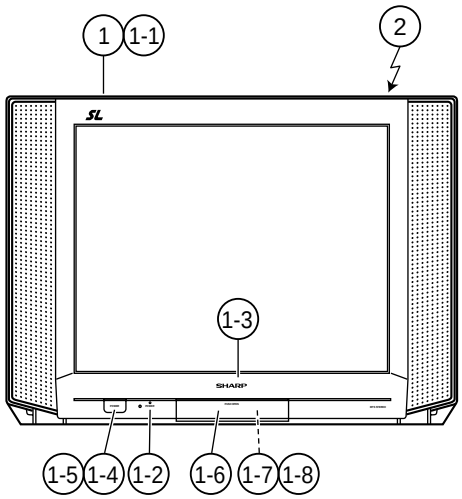

PACKING OF THE SET

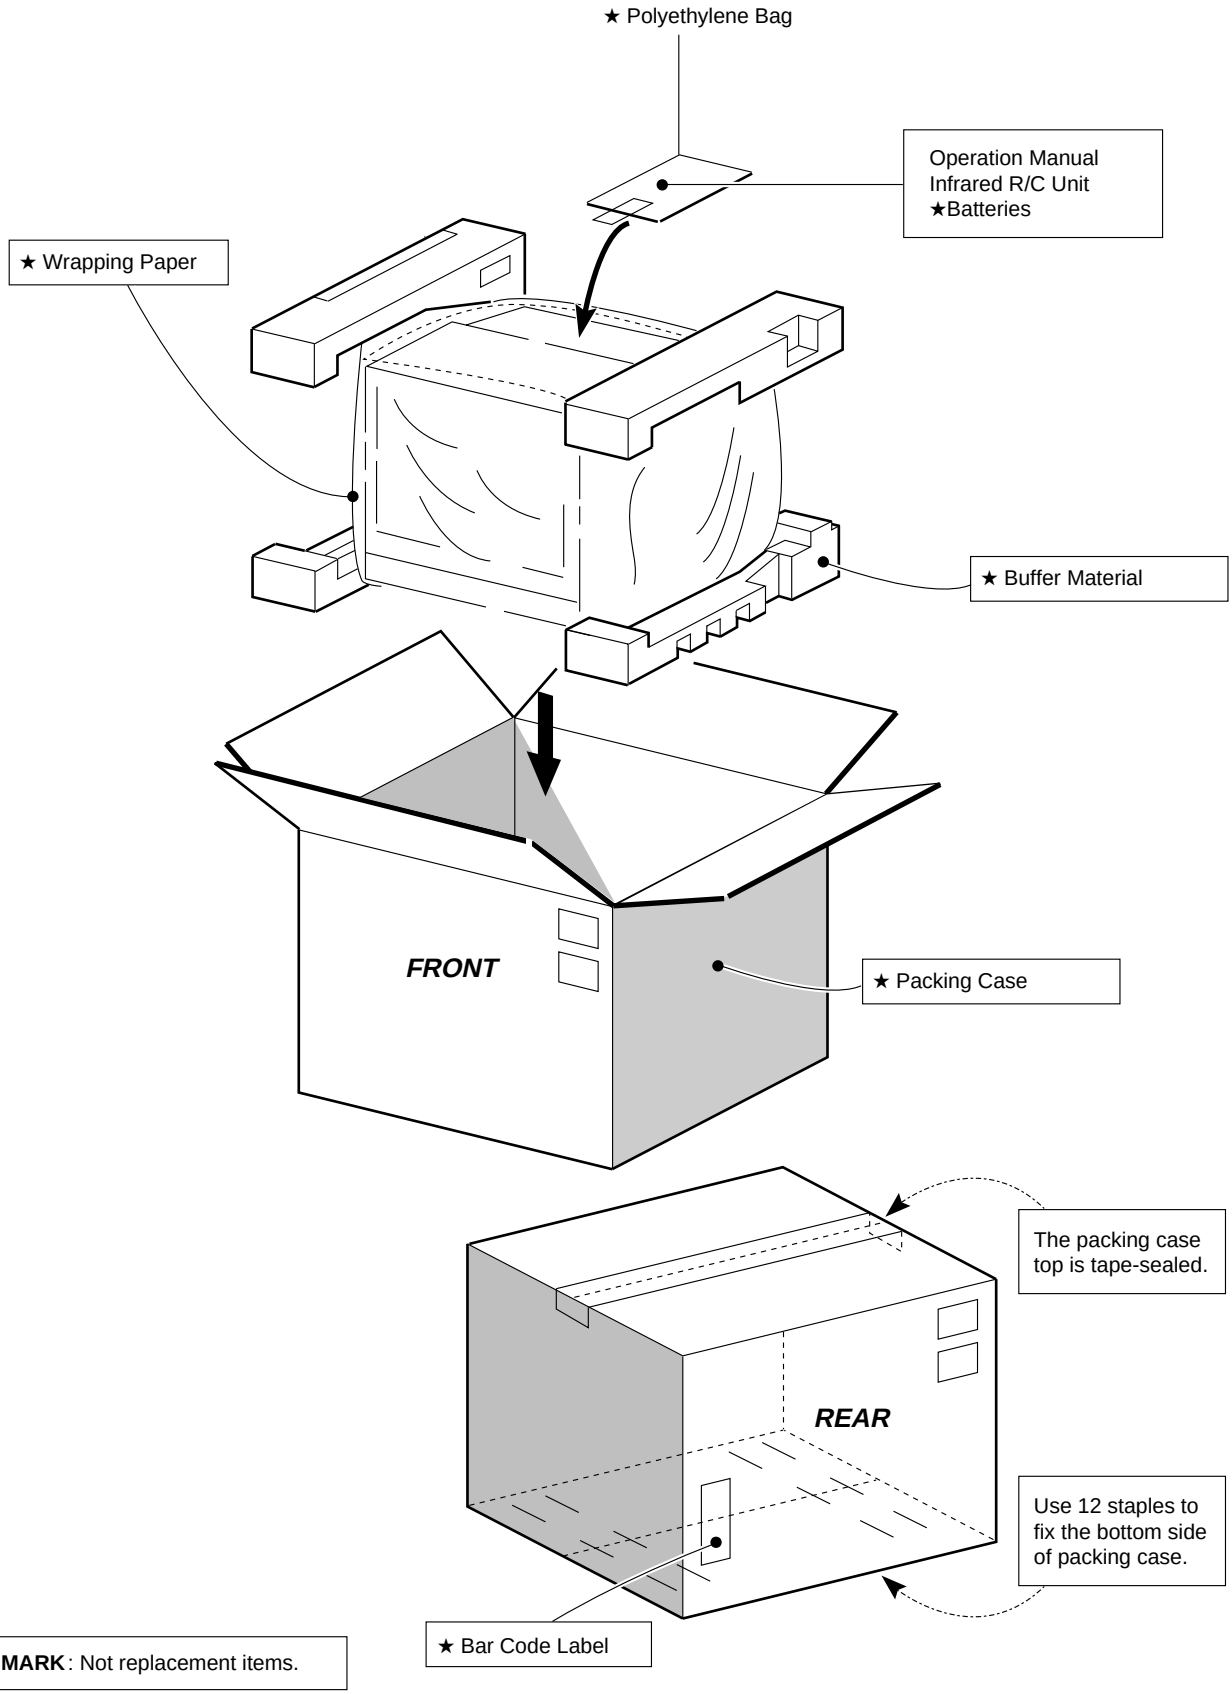

★ **MARK**: Not replacement items.

SHARP

COPYRIGHT © 2000 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced,
stored in a retrieval system, or transmitted in
any form or by any means, electronic, mechanical,
photocopying, recording, or otherwise, without
prior written permission of the publisher.

ⒹSEMEX ⓅSEMEX TQ0978-S
Sep. 2000 Printed in Japan
MI. KG

SHARP CORPORATION
AV Systems Group
Quality & Reliability Control Center
Yaita, Tochigi 329-2193, Japan

Other ManualsLib Projects

www.manualslib.com

www.manualslib.de

www.manualslib.es

www.manualslib.fr

www.manualslib.nl

www.manualslib.mx

www.manualslib.tech 30+ Languages